

100370024 100370024  
JC13 Rec'd PCT/PTC 26 FEB 2002

FORM PTO-1390 (REV. 12-2001)		U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE		ATTORNEY'S DOCKET NUMBER	
TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371				FORSAL-36	
				U.S. APPLICATION NO. (If known, see 37 CFR 1.5)	
INTERNATIONAL APPLICATION NO. PCT/FI00/00726		INTERNATIONAL FILING DATE 25 August 2000 (25.08.00)		PRIORITY DATE CLAIMED 27 August 1999 (27.08.99)	
TITLE OF INVENTION SHOE ROLL					
APPLICANT(S) FOR DO/EO/US HOLOPAINEN, Kari; KYITSONEN, Markku; PULLINEN, Hannu; MANNIO, Aaron and KIRVESMAKI, Markku					
Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:					
<p>1. <input checked="" type="checkbox"/> This is a <b>FIRST</b> submission of items concerning a filing under 35 U.S.C. 371.</p> <p>2. <input type="checkbox"/> This is a <b>SECOND</b> or <b>SUBSEQUENT</b> submission of items concerning a filing under 35 U.S.C. 371.</p> <p>3. <input checked="" type="checkbox"/> This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (21) indicated below.</p> <p>4. <input checked="" type="checkbox"/> The US has been elected by the expiration of 19 months from the priority date (Article 31).</p> <p>5. <input checked="" type="checkbox"/> A copy of the International Application as filed (35 U.S.C. 371(c)(2))</p> <p>    a. <input checked="" type="checkbox"/> is attached hereto (required only if not communicated by the International Bureau).</p> <p>    b. <input type="checkbox"/> has been communicated by the International Bureau.</p> <p>    c. <input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US).</p> <p>6. <input type="checkbox"/> An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)).</p> <p>    a. <input type="checkbox"/> is attached hereto.</p> <p>    b. <input type="checkbox"/> has been previously submitted under 35 U.S.C. 154(d)(4).</p> <p>7. <input type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))</p> <p>    a. <input type="checkbox"/> are attached hereto (required only if not communicated by the International Bureau).</p> <p>    b. <input type="checkbox"/> have been communicated by the International Bureau.</p> <p>    c. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired.</p> <p>    d. <input type="checkbox"/> have not been made and will not be made.</p> <p>8. <input type="checkbox"/> An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371 (c)(3)).</p> <p>9. <input type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).</p> <p>10. <input type="checkbox"/> An English lanugage translation of the annexes of the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).</p> <p><b>Items 11 to 20 below concern document(s) or information included:</b></p> <p>11. <input checked="" type="checkbox"/> An Information Disclosure Statement under 37 CFR 1.97 and 1.98.</p> <p>12. <input type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.</p> <p>13. <input checked="" type="checkbox"/> A <b>FIRST</b> preliminary amendment.</p> <p>14. <input type="checkbox"/> A <b>SECOND</b> or <b>SUBSEQUENT</b> preliminary amendment.</p> <p>15. <input checked="" type="checkbox"/> A substitute specification.</p> <p>16. <input type="checkbox"/> A change of power of attorney and/or address letter.</p> <p>17. <input type="checkbox"/> A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 - 1.825.</p> <p>18. <input type="checkbox"/> A second copy of the published international application under 35 U.S.C. 154(d)(4).</p> <p>19. <input type="checkbox"/> A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4).</p> <p>20. <input type="checkbox"/> Other items or information:</p>					

U.S. APPLICATION NO. <b>107070024</b>		INTERNATIONAL APPLICATION NO. <b>PCT/FI00/00726</b>		ATTORNEY'S DOCKET NUMBER <b>FORSAL-36</b>	
---------------------------------------	--	---	--	--	--

<b>21. <input checked="" type="checkbox"/> The following fees are submitted:</b> <b>BASIC NATIONAL FEE (37 CFR 1.492 (a) (1)-(5)):</b> Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO ..... <b>\$1040.00</b>  International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO ..... <b>\$890.00</b>  International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO ..... <b>\$740.00</b>  International preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4) ..... <b>\$710.00</b>  International preliminary examination fee (37 CFR 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4) ..... <b>\$100.00</b>  <b>ENTER APPROPRIATE BASIC FEE AMOUNT =</b>				<b>CALCULATIONS PTO USE ONLY</b>          	
				\$	1040.00
Surcharge of <b>\$130.00</b> for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).				\$	
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE	\$	
Total claims	18 - 20 =	0	x \$18.00	\$	
Independent claims	2 - 3 =	0	x \$84.00	\$	
MULTIPLE DEPENDENT CLAIM(S) (if applicable)				\$	
				\$	
<b>TOTAL OF ABOVE CALCULATIONS =</b>				\$	1040.00
<input type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced by 1/2.				\$	
<b>SUBTOTAL =</b>				\$	
Processing fee of <b>\$130.00</b> for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).				\$	
<b>TOTAL NATIONAL FEE =</b>				\$	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). <b>\$40.00</b> per property +				\$	
<b>TOTAL FEES ENCLOSED =</b>				\$	1040.00
				Amount to be refunded:	\$
				charged:	\$

a. ☒ A check in the amount of \$ 1040.00 to cover the above fees is enclosed.

b. ☐ Please charge my Deposit Account No. \_\_\_\_\_ in the amount of \$ \_\_\_\_\_ to cover the above fees.  
 A duplicate copy of this sheet is enclosed.


c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any  
 overpayment to Deposit Account No. 15-0660 A duplicate copy of this sheet is enclosed.

d. ☐ Fees are to be charged to a credit card. **WARNING:** Information on this form may become public. **Credit card  
 information should not be included on this form.** Provide credit card information and authorization on PTO-2038.

**NOTE:** Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR  
 1.137 (a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:  
 David R.J. Stiennon  
 Lathrop & Clark LLP  
 740 Regent Street, Suite 400  
 P.O. Box 1507  
 Madison, WI 53701-1507  
 USA

  
 SIGNATURE  
David R.J. Stiennon  
 NAME  
33,212  
 REGISTRATION NUMBER

10/070024  
JC13 Rec'd PCT/PTO 26 FEB 2002

In The United States Patent And Trademark Office

Applicant: Kari Holopainen et al.

Date: February 26, 2002

Date Filed: Simultaneously herewith

Docket No.: FORSAL-36

PCT App. No.: PCT/FI00/00726

For: Shoe Roll

---

**EXPRESS MAIL LETTER**

---

Box PCT  
Assistant Commissioner for Patents  
Washington, D.C. 20231

Dear Sir:

"Express Mail" Mailing Label No.: EV 015 204 331 US  
Date of Deposit: February 26, 2002

I hereby certify that these attached documents:


- Response postcard
- Check in the amount of \$1040.00
- PTO-1390 Transmittal Letter to the United States Designated/Elected Office (DO/EO/US)  
Concerning a Filing Under 35 U.S.C. 371 (2 pp)(2 copies)
- PCT Cover Sheet (2 pp) and Copy of International Application (specification and claims 17 pages; 2  
sheets of formal drawings) with attached copy of International Search Report (3 pp)
- Preliminary Amendment (6 pp)
- Submission of Substitute Specification under 37 C.F.R. § 1.125 (1 p)
- Clean Copy of Substitute Specification under 37 C.F.R. 1.125(c) (17 pp)
- Marked Up Copy of Substitute Specification under 37 C.F.R. 1.125(b)(2) (17 pp)
- Information Disclosure Statement (2 pp)
- PTO/SB/08A (1 p) with 15 attached documents

are being deposited with the United States Postal Service "Express Mail Post Office to Addressee"  
service under 35 C.F.R. §1.10 on the date indicated above and is addressed to the Assistant  
Commissioner for Patents, Washington, D.C. 20231.

  
David R. J. Stiennon Reg. No. 33212

Enclosed for filing please find the above-referenced documents. Please indicate receipt by  
returning the attached postcard with the official Patent and Trademark Office receipt and serial number  
stamped thereon.

Respectfully submitted,

  
David R. J. Stiennon, Reg. No. 33212

Attorney for Applicant

Lathrop & Clark LLP

740 Regent Street, Suite 400, P.O. Box 1507

Madison, Wisconsin 53701-1507

(608) 257-7766

10070024-10/070024

JC13 Rec'd PCT/PTO 26 FEB 2002

In The United States Patent And Trademark Office

Applicant: Kari Holopainen et al.

Date: February 26, 2002

Date Filed: Simultaneously herewith

Docket No.: FORSAL-36

PCT App. No.: PCT/FI00/00726

For: Shoe Roll


**Certificate of Express Mailing**

I hereby certify that this document is being deposited with  
the United States Postal Service "Express Mail Post Office to  
Addressee" service under 35 C.F.R. §1.10

on Feb. 26, 2002

with Mailing Label No. EV 015 204 331 US

and is addressed to the Assistant Commissioner for Patents,  
Washington, D.C. 20231.

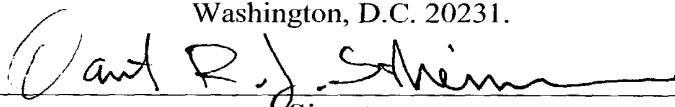

Signature

David R. J. Stiennon, Reg. No. 33212

Name of applicant, assignee or Registered Representative

Preliminary Amendment

Assistant Commissioner for Patents  
Washington, D.C. 20231

Dear Sir:

Prior to examination of the above application, please amend the application as follows.

**In the Specification:**

Please amend the specification as shown on the accompanying Clean Copy of Substitute Specification. A Marked Up Copy of Substitute Specification is also provided, as well as a Statement as to Lack of New Matter under 37 C.F.R. 1.125(b)(1).

**In the Claims:**

Please cancel claims 1-13.

Applicant: Kari Holopainen et al.  
PCT App. No.: PCT/FI00/00726

14. A calender having a plurality of calender rolls arranged one upon the other, and including a top calender roll and a bottom calender roll, and defining in operation at least one profiling nip for profiling a fibrous web that is being calendered, at least one of the calender rolls defining the profiling nip being a shoe roll comprising an outer shell and at least one row of internal shell-loading shoe means for profiling the shell, the nip and the fibrous web as well as for controlling contact in the nip, the improvement comprising:

- the shoe roll is located between the top and bottom calender rolls;
- the shoe roll outer shell is of continuous-fibre reinforced composite material; and
- the at least one row of internal shell-loading shoe means of the shoe roll is arranged parallel to a nip defined against the shoe roll.

15. The calender of claim 14 wherein the plurality of calender rolls further comprises a first press roll below the upper roll, and a first intermediate roll below the first press roll, and a second press roll above the bottom calender roll, and a second intermediate roll above the second press roll, and wherein both the first intermediate roll and the second intermediate roll are shoe rolls.

16. The calender of claim 14 wherein there are a plurality of rows of internal shell-loading shoe means within the shoe roll, the rows being uniformly spaced with respect to one another in the circumferential direction of the composite material outer shell.

17. The calender of claim 14 wherein the top calender roll is a shoe roll.

18. The calender of claim 14 wherein the the bottom calender roll is a shoe roll.

19. The calender of claim 14 wherein the properties of the composite material outer shell of the shoe roll are achieved by a fibre orientation such that the composite shell is more rigid in the circumferential direction than in the axial direction.

Applicant: Kari Holopainen et al.  
PCT App. No.: PCT/FI00/00726

20. The calender of claim 19, wherein the continuous-fibre reinforced composite material includes plastic or epoxy reinforced by glass fibres or carbon fibres, and that in order to provide a shell which is more rigid in the circumferential direction in relation to the axial direction of the shoe roll, orientation of the fibres of the composite material has been accomplished such that a major proportion of the fibres of the composite material of the shell of the shoe roll are directed at an angle of over  $45^\circ$  with respect to the axis of the shoe roll.

21. The calender of claim 20, wherein the angle is in the range of  $70^\circ$ – $90^\circ$ .

22. The calender of claim 14 wherein the shoe roll is a hydraulically zone-controlled roll, the composite shell of which is supported from a non-rotating central shaft of the shoe roll by means of hydrostatic loading arrangements which transfer the nip force directed at the composite shell rotating around the central shaft so as to be carried by the central shaft.

23. The calender of claim 22 wherein the hydrostatic loading arrangements comprise rows of loading shoes.

24. The calender of claim 14 wherein the calender has at least one intermediate roll positioned between the calender top roll and the calender bottom roll, and wherein at least one of the top roll, the at least one intermediate roll, and the bottom roll is a shoe roll.

25. The calender of claim 14 wherein in calender operation, the shoe roll is separable from a nip forming contact with a press roll or another shoe roll.

Applicant: Kari Holopainen et al.  
PCT App. No.: PCT/FI00/00726

26. The calender of claim 14 wherein the plurality of calender rolls comprises two stacks of three rolls, one of the two stacks defining an upper stack, and the other of the two stacks defining a lower stack, the upper stack being placed upon the lower stack such that between the two stacks there remains a space which is defined by a bottom roll of the upper stack and by a top roll of the lower stack, wherein the bottom roll of the upper stack and the top roll of the lower stack can be separated from contact with rolls of their own roll stack into nip contact with each other.

27. The calender of claim 26 wherein the bottom roll of the upper stack and the top roll of the lower stack are shoe rolls having roll shells, and at least the bottom roll of the upper roll stack and the top roll of the lower roll stack are fixedly mounted on a calender frame such that their shells can be displaced in the direction of the roll stack with respect to roll supports of the rolls.

28. The calender of claim 27 wherein at least the bottom roll of the upper roll stack and the top roll of the lower roll stack are provided with loading members located inside their roll shells.

Applicant: Kari Holopainen et al.  
PCT App. No.: PCT/FI00/00726

29. A calender for treatment of a fibrous web passing therethrough, the calender comprising:

- a frame;
  - a top roll mounted to the frame;
  - a first press roll mounted to the frame beneath the top roll;
  - a first intermediate roll mounted to the frame beneath the first press roll, wherein the top roll, the first press roll, and the first intermediate roll comprise a first stack;
  - a second intermediate roll mounted to the frame beneath the first intermediate roll;
  - a second press roll mounted to the frame beneath the second intermediate roll;
  - a bottom roll mounted to the frame beneath the second press roll, wherein the second intermediate roll, the second press roll, and the bottom roll comprise a second stack; and
- wherein the rolls of the first stack and the second stack other than the top roll and the bottom roll define at least one profiling nip, and one of the rolls defining the profiling nip being a shoe roll having an outer shell and at least one row of internal shell-loading shoe means for profiling the shell, the nip and the fibrous web as well as for controlling contact in the nip, and wherein the shoe roll outer shell is of continuous-fibre reinforced composite material and the at least one row of internal shell-loading shoe means of the shoe roll is arranged parallel to a nip defined against the shoe roll.

30. The calender of claim 29 wherein the first intermediate roll and the second intermediate roll are shoe rolls, each having outer shells and at least one row of internal shell-loading shoe means, the shoe means being operable to load the first intermediate roll against the first press roll and the second intermediate roll against the second press roll, or alternatively to load the first intermediate roll against the second intermediate roll.



Applicant: Kari Holopainen et al.  
PCT App. No.: PCT/FI00/00726


31. The calender of claim 30 wherein the first intermediate roll and the second intermediate roll are fixedly mounted on the frame such that their shells can be displaced in the direction of the roll stack with respect to roll supports of the rolls.

**REMARKS**

Claims 14–31 remain pending in the application.

Applicant believes that no new matter has been added by these amendments and that the application, as amended, is ready for examination. Favorable action thereon is respectfully solicited.

Respectfully submitted,

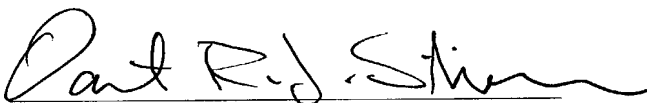

David R. J. Stiennon, Reg. No. 33212  
Attorney for Applicant  
Lathrop & Clark LLP  
740 Regent Street, Suite 400, P.O. Box 1507  
Madison, Wisconsin 53701-1507  
(608) 257-7766

Amdt1.app

1007024-030202

10/070024  
03 Sept 2002

In The United States Patent And Trademark Office

Applicant: Kari Holopainen et al.

Date: August 26, 2002

Date Filed: February 26, 2002

Docket No.: FORSAL-36

App. No.: 10/070,024

For: Shoe Roll

Certificate of Mailing

I hereby certify that this correspondence is being deposited  
with the United States Postal Service as first class mail in an  
envelope addressed to:

Assistant Commissioner for Patents,  
Washington, D.C. 20231

on 26 August 2002

Date

David R. J. Stiennon

Signature

David R. J. Stiennon, Reg. No. 33212

Name of applicant, assignee or Registered Representative

Second Preliminary Amendment

Box Missing Parts

Assistant Commissioner for Patents

Washington, D.C. 20231

Dear Sir:

Prior to examination of the above application, please amend the application as follows.

In the Claims:

Please cancel claim 30.

Applicant: Kari Holopainen et al.  
Application No.: 10/070,024  
Art Unit:

29. (Amended) A calender for treatment of a fibrous web passing therethrough, the calender comprising:

- a frame;
- a top roll mounted to the frame;
- a first press roll mounted to the frame beneath the top roll;
- a first intermediate roll mounted to the frame beneath the first press roll, wherein the top roll, the first press roll, and the first intermediate roll comprise a first stack;
- a second intermediate roll mounted to the frame beneath the first intermediate roll;
- a second press roll mounted to the frame beneath the second intermediate roll;
- a bottom roll mounted to the frame beneath the second press roll, wherein the second intermediate roll, the second press roll, and the bottom roll comprise a second stack; and

wherein the first intermediate roll and the second intermediate roll are shoe rolls, each having outer shells and at least one row of internal shell-loading shoe means, the shoe means being operable to load the first intermediate roll against the first press roll and the second intermediate roll against the second press roll, or alternatively to load the first intermediate roll against the second intermediate roll.

Applicant: Kari Holopainen et al.  
Application No.: 10/070,024  
Art Unit:

31. (Amended) The calender of claim 29 wherein the first intermediate roll and the second intermediate roll are fixedly mounted on the frame such that their shells can be displaced in the direction of the roll stack with respect to roll supports of the rolls.

Please add the following new claim:


32. The calender of claim 29 wherein each shoe roll outer shell is of continuous-fibre reinforced composite material.

#### Remarks

Claims 14–29 and 31–32 remain pending in the application.

Applicant believes that no new matter has been added by these amendments and that the application, as amended, is ready for examination. Favorable action thereon is respectfully solicited.

Respectfully submitted,

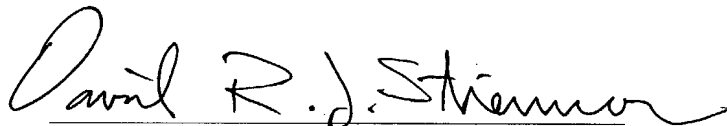

David R. J. Stiennon, Reg. No. 33212  
Attorney for Applicant  
Lathrop & Clark LLP  
740 Regent Street, Suite 400  
P.O. Box 1507  
Madison, Wisconsin 53701-1507  
(608) 257-7766

Amdt2.res/amdt

Applicant: Kari Holopainen et al.

Date: August 26, 2002

Date Filed: February 26, 2002

Docket No.: FORSAL-36

App. No.: 10/070,024

For: Shoe Roll

### Version with Markings to Show Changes Made

Amendments to the Claims, under 37 C.F.R. § 1.121 (c)(1)(ii)

Please cancel claim 30.

29. (Amended) A calender for treatment of a fibrous web passing therethrough, the calender comprising:

- a frame;
- a top roll mounted to the frame;
- a first press roll mounted to the frame beneath the top roll;
- a first intermediate roll mounted to the frame beneath the first press roll, wherein the top roll, the first press roll, and the first intermediate roll comprise a first stack;
- a second intermediate [intermediate] roll mounted to the frame beneath the first intermediate roll;
- a second press roll mounted to the frame beneath the second intermediate roll;
- a bottom roll mounted to the frame beneath the second press roll, wherein the second intermediate roll, the second press roll, and the bottom roll comprise a second stack; and

wherein [the rolls of the first stack and the second stack other than the top roll and the bottom roll define at least one profiling nip, and one of the rolls defining the profiling nip being a shoe roll having an outer shell and at least one row of internal shell-loading shoe means for profiling the shell, the nip and the fibrous web as well as for controlling contact in the nip, and wherein the shoe roll outer shell is of continuous-fibre reinforced composite material and the at least one row of internal shell-loading shoe means of the shoe roll is arranged parallel to a nip defined against the shoe roll] the first intermediate roll and the second intermediate roll are shoe rolls, each having outer shells and at least one row of internal shell-loading shoe means, the shoe means being operable to load the first intermediate roll against the first press roll and the second intermediate roll against the second press roll, or alternatively to load the first intermediate roll against the second intermediate roll.

31. (Amended) The calender of claim [30] 29 wherein the first intermediate roll and the second intermediate roll are fixedly mounted on the frame such that their shells can be displaced in the direction of the roll stack with respect to roll supports of the rolls.

Please add the following new claim:

32. The calender of claim 29 wherein each shoe roll outer shell is of continuous-fibre reinforced composite material.

## Shoe roll

- 5 The present invention relates to calendering of a fibrous web, such as a paper and board web. More specifically, the present invention relates to a shoe roll for a multi-roll calender according to the preamble of claim 1.

10 Calendering is a method by means of which the properties, in particular the thickness profile, smoothness, gloss, surface porosity and translucence of a web-like material, such as a paper web, are sought to be generally improved. In calendering the paper web is passed into a nip which is formed between rolls pressed against each other and in which the paper web is deformed by the action of temperature, moisture and nip pressure, in which connection the physical properties of the paper web can be affected by controlling  
15 the above-mentioned parameters and the time of action. The good physical properties attained by calendering lead to better print quality, thereby bringing a competitive advantage to the manufacturer of paper.

20 Shoe and/or extended-nip calendering is calendering in a calender unit in which a nip is formed between a roll provided with a resilient shell, the shell of said roll being made, for example, of polyurethane, and a press roll or shoe roll which has a rigid shell and is provided with an internal loading shoe and which is made of metal, such as steel.

25 In a multi-roll calender, the paper web is calendered by passing the web through nips defined between calender rolls arranged one upon the other to form a stack of rolls. The rolls are mounted on the frame of the calender and they are arranged to be in nip contact with one another such that the paper web can be calendered by passing it through the nips and by arranging a given load between the rolls in order to provide a linear load in the nip. For example, Finnish patent 95062, which corresponds to US patent 5,590,593, discloses  
30 a calender in which the two lowest rolls in a stack formed by four rolls are deflection-compensated rolls, advantageously zone-controlled rolls and they are mounted so as to be stationary, i.e. their bearing housings are rigidly suspended from supports mounted on the

frame of the calender. The two topmost rolls, of which the highest one is also a deflection-compensated roll, preferably a zone-controlled roll, are mounted to be movable such that their bearing housings are attached to loading arms pivotally mounted by means of articulated joints on the frame of the calender. The highest deflection-compensated roll  
5 can be provided with a resilient coating and the second topmost roll is a heatable so-called thermo roll. The lowest deflection-compensated roll in the roll stack can also be provided with a resilient coating. The calender has alternative modes of operation, such as, for example, passing the paper web to be calendered through all three nips with the nips closed or, by opening the topmost nips, through only two or one nip, respectively. It is  
10 mentioned that the advantages include, among other things, the fact that the calender principally provides all the same advantages as are achieved by conventional soft calenders, in addition to which the middle nip in the calender is a hard nip, by means of which caliper can be equalized. Moreover, the modifiability of the calender makes it suitable for many paper grades.

15 Similar modifiable calenders are also disclosed in European application publication 890676 and in GB application publication 2,119,422. European application publication 890676 discloses a calender in which six rolls are attached to a frame to form a calender stack. The topmost roll is fixedly attached to the frame, the middle rolls are attached to  
20 loading arms, and the bottom roll is arranged in a carriage which can be displaced in a vertical direction in a guide. The topmost and lowermost rolls are deflection-compensated rolls, and the topmost and lowermost rolls as well as the two middle rolls are rolls provided with an elastic coating, while the second lowest roll and the second topmost roll are hard-surface rolls. It is typical of the calender that when the topmost and lowermost  
25 nips are closed, the other nips therebetween are open, so that the web can be calendered symmetrically by means of the topmost and the lowermost nip and conducted without calendering through the open nips and via the take-out rolls situated adjacent to the rolls which form the opened nips.

30 GB application publication 2,119,422 in turn relates to an arrangement in which two stacks of three rolls are placed adjacent to each other on the same calender frame, the



middle roll in each of said stacks being a hard roll and fixedly mounted on the frame and the soft rolls situated on both sides of the middle roll being displaceable to an operating position into nip contact with the hard-surface roll and away from it. These rolls situated in both stacks above and beneath the hard roll are deflection-controlled rolls. One of the soft-surface rolls in each roll stack serves only as a spare roll, which can be employed when the soft-surface roll proper which is in nip contact, for instance, becomes damaged, and thus the calender operates in practice as a double nip calender formed by two roll pairs.

Figs. 5D and 5E of US patent 4,332,191 show a calender which comprises two stacks of three rolls placed one upon the other, in which the middle roll in the upper stack is a soft roll and all rolls in the lower stack are hard rolls. Moreover, the calender includes a stack of three rolls on the other side of the frame, the middle roll in the stack being soft. The web can be calendered by passing it via the stacks provided with a soft middle roll or, by lowering the bottom roll of the upper stack into contact with the lower stack, a stack of four hard rolls is provided, and the web is passed through three nips of said stack.

There is also known a soft calender under the name of OPTIGLOSS™, which comprises two separate sets of three rolls, in both of which the middle roll is a hard thermo roll and there is a soft-surface roll on both sides of it. This provides a calender having 6 rolls and 4 nips in all.

As described above, it is typical of all calender structures that nips are opened by means of loading arms or by displacing other support structures supporting the calender roll, such as a carriage supporting the roll in guides extending parallel to the roll stack. This is necessary in order that the nips may be opened when changing the mode of calendering, i.e. the number or location of the nips which are calendering, for example, when the paper grade to be produced is changed. Likewise, it is typical of previous arrangements, like EP890676, that the mode of calendering is changed by opening some of the nips and by passing the web through the remaining closed nips. This leads to the fact that many rolls have to be moved.

Shoe rolls are typically hydraulically deflection-compensated, zone-controlled rolls in which the shell is supported from a non-rotating central shaft of the roll by means of a hydrostatic loading arrangement, such as a row of loading shoes, which transfer the nip force acting on the shell rotating around the central shaft so as to be carried by the central shaft. The loading element is generally also divided into zones, in which connection the loading pressure can be regulated as required by profiling. The zoning in this kind of zone-controlled shoe roll may comprise individual elements of the loading arrangement, in which connection the number of zones in the roll and in the loading arrangement may exceed 60 - as examples may be mentioned the shoe rolls marketed by the applicant under the trademarks **SymCD™** and **SymCDS™**, or the zoning may comprise a group of individual elements of the loading arrangement, in which connection the roll and the loading arrangement normally comprise eight zones - as examples may be mentioned the shoe rolls marketed by the applicant under the trademarks **SymZ™**, **SymZS™**, **SymZL™**, and **SymZLC™**.

Shoe and/or extended-nip calendering has generally been found to be good for producing low-gloss paper grades, i.e. having a Hunter gloss % below 40, by calendering. When higher gloss is required, the nip pressure is, however, not sufficient to provide gloss. With ever-increasing running speeds, calendering is becoming a bottleneck in the papermaking process, and satisfactory quality is not achieved by today's machine calender units. Some of the drawbacks of the present papermaking process are also that

- the loss of bulk increases when gloss is improved, and
- in order to provide sufficient quality, it is necessary to use webs with an abundance of coating and/or to use off-line calendering, in particular multi-nip calendering, the known application of which is supercalendering, and/or soft calendering.

The direction in the calendering technology is to an ever increasing degree towards on-line solutions even when the intention is to manufacture higher quality printing paper grades, such as SC and glossy coated papers. Fig. 1 illustrates how different printing paper grades are calendered today and, in particular, it can be seen where the calendering technology is heading in the near future.

a. **Machine calendering** is calendering in a calender unit in which nips are formed between non-resilient smooth-surface metal rolls placed one upon the other. The width of the nip in a machine calender is typically very small and the nip load in the nips is relatively high.

5 b. **Multi-roll calendering**, the known applications of which include supercalendering and, for producing SC-A and LWC grades in particular, a multi-roll on-line or off-line calender which provides in off-line operation in practice the best result in terms of quality, is calendering in a calender unit in which nips are formed between a smooth-surface metal or cast iron roll and a roll coated with a resilient coating, such as a  
10 paper or polymer roll, in which connection a wide nip is formed. The resilient-surface roll conforms to the contours of the surface of paper and presses the opposite side of paper evenly against the smooth-surface metal roll. Because of the resilient-surface roll, the calendering time is also longer, wherefore in order to assure adequate capacity, the paper machine must be equipped today even with three multi-roll  
15 calenders. In a multi-roll calender there are today typically from one to two sets of rolls and 10 to 12 nips. For the purpose of treating both sides of the web, the supercalender comprises a so-called reversing nip in which there are two resilient-surface rolls placed against each other. The linear load in the multi-roll calender increases from the top nip to the bottom nip because of the gravity of the earth. By using relief of the  
20 rolls, this increase in load can be compensated for. This kind of multi-roll calender provided with the relieving of the rolls is the multi-roll calender marketed by the applicant under the trademark **OptiLoad™**.

c. **Soft calendering** is calendering in a calender unit in which nips are formed in a manner similar to that of a multi-roll or supercalender between a smooth-surface  
25 metal roll and a roll covered with a resilient coating, in which connection a wide nip is formed. In a soft calender, each nip is formed between separate roll pairs, in which connection the nip load in individual nips can be adjusted in each individual nip, or between roll pairs in separate sets of rolls, in which connection the nip load can be adjusted in each individual set of rolls. The soft calender can be used as an on-line  
30 calender and it can replace the machine calenders of a paper machine. In order to treat both sides of the web in the calender, the order of the roll pairs or of the sets of rolls

forming the successive nips is reverse with respect to the web such that the resilient-surface roll or the resilient-surface rolls can be caused to work on both surfaces of the web.

5 One object of the present invention is to eliminate or at least minimize the weaknesses and drawbacks associated with today's multi-roll calendering and to provide a new type of intermediate and/or middle roll for a multi-roll calender in order to improve the profileability of a fibrous web in the nips of a multi-roll calender, such as a multi-nip on-line or off-line calender, supercalender and/or soft calender. Another object of the present  
10 invention is to provide a calender that can be modified in a new, simple manner.

These objectives are achieved according to the invention by means of a shoe roll of the kind mentioned at the beginning, the principal special features of the shoe roll being set forth in the characterizing part of the accompanying independent claim 1.

15 In the shoe roll according to the invention, the shoe rows loading and profiling the shell of the shoe roll are arranged in the direction of the nips of the shoe roll, and the shell of the shoe roll is made of a composite material, the properties of which are selected with a fibre orientation such that the shell is more rigid in the circumferential direction than in  
20 the axial direction.

The calender according to one embodiment of the invention comprises two stacks of three rolls placed one upon the other, the rolls of the stacks being displaceable so as to provide one operation nip between the middle rolls or two operation nips in both stacks.

25 Both of the stacks of three rolls placed one upon the other in the same calender frame of the calender have advantageously a thermo roll in the middle and a soft-surface roll above and underneath. The soft-surface rolls are advantageously rolls provided with a movable shell, which means that they can be displaced in the direction of the nip plane by displacing the shells in the radial direction. The movable-shell rolls are fixedly attached to the  
30 frame of the calender. In that connection, the lower movable-shell roll in the upper roll

stack and the upper movable-shell roll in the lower roll stack can be moved by displacing the shells into nip contact with each other and apart from nip contact with the middle roll of the upper roll stack and the middle roll of the lower roll stack, respectively. Likewise, the top roll in the upper roll stack and the bottom roll in the lower roll stack can be displaced by means of a movement of the roll shell taking place in the direction of the nip plane apart from the middle roll and back into nip contact with the middle roll. The rolls are fixedly attached to the frame at such distances from one another that all the nips can be opened by means of movements of the movable-shell rolls.

With respect to the advantages of the shoe roll according to the invention it may be mentioned that the loading of the nip can be simultaneously changed by means of individual shoes or a group of shoes of the shoe rows which are loading the shell of the shoe roll and which are spaced from one another in the circumferential direction, i.e. the load of the nip can be increased and/or reduced, thereby providing successive nips which profile in the same way and enhance the result of calendering. The invention also makes it possible that all the nips of a multi-roll calender can now be made profiling nips by means of the shoe roll and that the top and/or the bottom roll of a multi-roll calender, such as a supercalender, can now be made a profiling top and/or bottom roll.

In accordance with an embodiment of the invention regarded as particularly advantageous, the composite material is advantageously selected from a group which includes: continuous-fibre reinforced plastic; glass fibre; a composite of carbon fibres and/or epoxy.

In order that the shell should be more rigid in the circumferential direction than in the axial direction, in an embodiment of the invention considered advantageous, the fibre orientation of the composite material has been accomplished such that a major proportion of the fibres has been wound at an angle of over 45° with respect to the axis of the roll. Advantageously, this winding angle is in the range of 70° - 90°.

The invention enables the calender to be modified only by arranging the middle rolls (the top roll in the lower roll stack and the bottom roll in the upper roll stack) into nip contact

with each other and apart from each other into nip contact with the middle roll of their own stack. This allows, for example, symmetric calendering to be accomplished in four nips formed by hard-surface and soft-surface rolls while the nip formed between the top calender roll of the lower stack and the bottom roll of the upper stack is open, or matte  
5 calendering to be accomplished by passing the web out of the calender through the closed nip between the bottom roll of the upper stack and the top roll of the lower stack. By dimensioning the positioning of the roll shafts, the diameters of the roll shells and the distances of the radial movement of the roll shells in a suitable manner, the change can be accomplished only by displacing roll shells, i.e. separate transfer devices for displacement  
10 of the entire roll are not needed.

With respect to the advantages of other details and the structural details of the invention, reference is made to the dependent claims of the accompanying set of claims.

15 In the following, the invention will be described in more detail with reference to the accompanying patent drawings, in which

Figure 1 shows how different printing paper grades are calendered today and, in particular, the direction in which the calendering technology is heading in the near future,

Figure 2 is a schematic sectional view of a multi-roll calender,

20 Figure 3 is a side view of a calender with nips open,

Figure 4 shows a calender in a first running situation, and

Figure 5 shows the calender in a second running situation.

In the multi-roll calender shown in Fig. 2, the run of a fibrous web which is being  
25 calendered is as follows. The fibrous web W which is calendered enters a top nip YN between a top roll 1 of the multi-roll calender and an upper rigid-shell press roll 2 provided with a smooth-surface metal or chilled shell 21, from which nip the fibrous web W runs around a guide member 3 (e.g. a guide roll) into an upper profiling nip PN1 between the rigid-shell press roll 2 and an upper intermediate or middle roll 4 according  
30 to the invention, which roll is a shoe roll provided with a shell 41 of a composite material, after which the fibrous web W runs around a guide member 5 (e.g. a guide roll) into a

reversing nip KN between the upper middle roll 4 according to the invention, which roll is a shoe roll, and a lower intermediate or middle roll 6 according to the invention, which roll is a shoe roll and also has a shell 61 of a composite material, after which the fibrous web W runs around a guide member 7 (e.g. a guide roll) into a lower profiling nip PN2 between a lower middle roll 6 according to the invention, which roll is a shoe roll, and a lower rigid-shell press roll 8 provided with a smooth-surface metal or chilled shell 81, after which the fibrous web W runs around a guide member 9 (e.g. a guide roll) into a bottom nip AN between the lower rigid-shell press roll 8 and a bottom roll 10 of the calender.

The upper middle roll 4 according to the invention comprises, according to the invention, a composite shell 41 and an upper shoe row 43 and a lower shoe row 42 which are arranged both at the profiling nip PN1 and at the reversing nip KN and which load and profile the upper profiling nip PN1 of the fibrous web, the reversing nip KN of the fibrous web and the composite shell 41. The lower middle roll 6 is substantially identical with the upper middle roll 4. Thus, the lower middle roll 6 comprises, according to the invention, a composite shell 61 and an upper shoe row 62 and a lower shoe row 63 which are arranged both at the reversing nip KN and at the profiling nip PN2 and which load and profile the reversing nip KN of the fibrous web, the lower profiling nip PN2 and the composite shell 61.

In order to provide successive profiling nips, which profile in the same way and enhance the result of calendering, the reversing nip KN in the multi-roll calender is preceded by at least one profiling nip PN1 (as shown in Fig. 2) in which the metal or chilled shell 21 of the upper rigid-shell press roll 2 and the composite shell 41 of the upper middle roll 4 according to the invention are placed against each other. In addition, for the purpose of enhancing the result of calendering, the reversing nip KN is followed by at least one profiling nip PN2 (as shown in Fig. 2) in which the composite shell 61 of the lower middle roll 6 according to the invention and the metal or chilled shell 81 of the lower rigid-shell press roll 8 are placed against each other.

In accordance with the invention, the properties of the composite material are selected with a fibre orientation such that the composite shell 41, 61 is considerably more rigid in the circumferential direction than in the axial direction, with the result that by changing the load of the shoe rows 42, 43, 62, 63, the profiles of the composite shell 41, 61, the  
5     profiling nip NP1, NP2 and/or the reversing nip KN can be changed. In that connection it becomes possible, among other things, to control the nip spacing and thus the linear load in the profiling nip PN1, PN2 and/or in the reversing nip KN and to correct any profile errors caused by different deflections of the rolls defining the nip by changing the profile of a roll shell or roll shells.

10     In order to make all the nips of the calender such that they can be profiled and that they profile the fibrous web W, in the embodiment shown in Fig. 2, in addition to the middle rolls 4 and 6, shells 11 and 101 of the top roll 1 and the bottom roll of the calender, respectively, have also been made of a composite material, which is advantageously the  
15     same composite material as the composite material of the shells of the middle rolls 4, 6. Since the top and bottom rolls 1, 10 have also been provided with an internal shoe row 12, 103 loading the shell, the profiles of the composite shell 11, 101, the top nip YN and/or the bottom nip AN can be changed by changing the load of the shoe rows 12, 103. In that connection it becomes possible, among other things, to control the spacing of the nip YN,  
20     PN1, KN, PN2, AN and to correct any profile error caused by different deflection of the upper and lower rolls defining the nip by changing the profile of the roll shell.

25     In accordance with an embodiment of the invention regarded as particularly advantageous, the composite material is selected from a group advantageously including: continuous-fibre reinforced plastic; glass fibre; a composite of carbon fibres and/or epoxy.

30     In order that the shell should be more rigid in the circumferential direction than in the axial direction, in an embodiment of the invention considered advantageous, the fibre orientation of the composite material has been accomplished such that a major proportion of the fibres has been wound at an angle of over 45° with respect to the axis of the roll 1, 4, 6, 10. Advantageously, this winding angle is in the range of 70° - 90°.



The shoe roll 1, 4, 6, 10 according to the invention is advantageously a hydraulically zone-controlled top roll, intermediate roll, middle roll or bottom roll of a calender, the composite shell 11, 41, 61, 101 of which roll is supported from a non-rotating central shaft of the roll by means of a hydrostatic loading arrangement 12;42;43; 62;63;103, such as a row of  
5 loading shoes which transfer the nip force acting on the composite shell rotating around the central shaft so as to be carried by the central shaft.

Fig. 3 is a side view of a calender. Six rolls are placed one upon the other on a frame R of the calender, said rolls forming two stacks A and B of three rolls. In the upper roll stack A,  
10 the top and bottom rolls 1 and 4 are rolls provided with a movable shell, the shells of said rolls being displaceable in the radial direction in the direction of the nip plane passing through the axes of rotation of the rolls. The roll shells of said rolls 1 and 4 are soft-surface shells, for example, provided with a polymer coating. Between the top and bottom rolls 1, 4 there is a hard heatable roll 2, i.e. a so-called thermo roll. The surface of this middle roll  
15 2 can be, for example, a smooth metal surface.

In the lower roll stack B, in which the nip plane of the rolls is a continuation of the nip plane of the upper roll stack A, there are rolls which are identical with and in the same order as the rolls in the upper roll stack A, i.e. a middle hard heatable thermo roll 8 and,  
20 above and beneath it, a soft-surface movable-shell roll 6 and 10, respectively.

The movable-shell rolls 1, 4, 6, and 10 are so-called Sym-rolls, inside which there are loading members applying a force in a radial direction, which members are located on a stationary shaft and distributed in different zones across the machine width and by means  
25 of which the roll shell can be displaced in a radial direction and, in particular, in the direction of the nip plane in order to open and close the nip formed by the roll and to load the roll in a controlled manner.

The movable-shell soft rolls 1, 4, 6, and 10 in both roll stacks A, B have all identical  
30 measures and structure, and the middle rolls 3 and 8 in both roll stacks A, B have identical

measures and structure, with the result that only two types of rolls need be arranged as spare parts for the calender.

5 The movable-shell rolls 1, 4, 6, and 10 are attached to the roll frame R by means of supports 13 which have substantially fixed positions and which support the stationary shaft of the roll at both ends. Even though Fig. 3 shows a horizontal bolt 14 for attaching the supports 13 to the calender frame R, other means of attachment can also be used by which the supports can be arranged to be in a fixed position on the frame. The bearing housings of the middle rolls 4 and 6 of the roll stacks A, B can be attached to the frame R by means  
10 of articulation supports and said rolls can be relieved hydraulically according to the known principles concerning sets of articulation rolls at both ends by means of a hydraulic cylinder acting between the bearing housing and the frame.

15 The rolls are placed in two superimposed stacks A, B such that the movable-shell rolls 1, 4, 6, and 10 can be displaced apart from the middle hard rolls 2 and 8, and the bottom roll 4 of the upper roll stack and the top roll 6 of the lower roll stack are not in contact with each other, in which connection all the nips YN, PN1, KN, PN2, AN from top to bottom are open. Fig. 3 shows this situation. The distance d between the roll shells in the nips can be a few millimetres, for example, below 10 mm.

20 Fig. 4 shows a first running situation in which both nips YN, PN1 and PN2, AN of each roll stack A, B are closed, i.e. a calendering nip is formed on both sides of the heated thermo roll 2, 8 with the respective soft-surface roll 1, 4, 6, and 10. In other words, the web which is being calendered is run through four nips in total, which are all nips formed  
25 by a soft-surface roll and a hard heated roll. Between the roll stacks, the web runs through the open nip KN. The web will also be calendered symmetrically, i.e. in the first roll stack, the first surface is against a hard hot-surface roll and, in the next stack, the opposite surface is against a hard hot-surface roll. By regulating load and/or temperature, the different sides can also be treated differently in the successive roll stacks A, B.

Fig. 5 shows a second running situation in which the bottom roll 4 in the upper roll stack A and the top roll 6 in the lower roll stack B have been moved apart from the middle roll 2 and 8 of the respective roll stack, i.e. they have been moved into contact with each other in the direction of the nip plane in order to close the space left between the roll stacks, whereby the calendering nip KN is formed which is defined by a soft-surface roll on both sides. In this mode of running, the web to calendered is passed only through this nip KN in order to implement matte calendering. In this running mode, the rolls 4 and 6, Sym-rolls, are turned through  $180^\circ$  such that the loading members are placed at the calendering nip KN. If either roll or both rolls is/are provided with two series of loading members located inside the roll shell at a distance of  $180^\circ$  from each other, the roll need not be turned.

The nip KN can also be formed such that the bottom roll 10 of the lower stack B and the middle roll 8 attached to the frame by means of articulation supports are lowered, with the result that the nip PN2 becomes free, and the bottom roll 4 of the upper stack A is lowered to form the nip KN.

No separate loading cylinders are needed in the calender because loading can be accomplished by means of the loading members located inside the shells of the Sym-rolls (soft-surface rolls 1, 4, 6, 10).

Figs. 3-5 also show take-out rolls 3, 5, 7, 9 typical of the calender, by means of which the web W which is being calendered can be taken out of the nips and which have been placed on both sides of the roll stacks A,B.

On-line calendering of paper is advantageously accomplished by means of the calender described above, in which connection it can be placed in a papermaking line. The calender is short in the machine direction, with the result that it is easy to place in an existing line, for example, in connection with rebuilds. Moreover, a change of the mode of running from the mode of calendering shown in Fig. 4 to the mode of calendering shown in Fig. 5 and vice versa is easy to accomplish.

Above, the invention has been described only by way of example by means of one of its embodiments regarded as advantageous. This is, of course, not intended to limit the invention and, as is clear to a person skilled in the art, many different alternative solutions and modifications are feasible within the inventive idea and its scope of protection defined in the accompanying claims. The wide usability of the present invention in almost all kinds of calendering applications, with the exception of pure machine calendering, shall be particularly noted.

The shoe roll provided with a composite shell according to the invention enables the calender to be run and used with different nip combinations. Some of the nips can be kept open. For example, in the case shown in Fig. 2, the nips AN and PN2 can be left open, in which connection the web W is passed directly from the knip KN to reeling. In that connection, the calender shown in Fig. 2 can be arranged to comprise two nips by feeding pressure only for the shoe 43 in the roll 4 and leaving the shoe 42 without pressure. Thereby, a calender is provided which has two successive nips profiling the web W on the same side. When the shoes 12 and 43 above and beneath the nips YN and PN1 are simultaneously pressed or relieved, two successive nips can be provided which profile the web W in the same way, which enhances the outcome.

## Claims

1. A shoe roll for a calender, advantageously for a multi-roll on-line or off-line calender, soft calender or equivalent, which calender comprises at least one nip (YN, PN1, KN, PN2, AN) profiling a fibrous web (W) that is being calendered, **characterized** in that the shoe roll (1, 4, 6, 10) constitutes at least one of the calender rolls which define the nip (YN, PN1, KN, PN2, AN), that a shell (11, 41, 61, 101) of the shoe roll (1, 4, 6, 10) is of a composite material, and that the shoe roll (1, 4, 6, 10) is provided with internal shell-loading means (12, 42, 43, 62, 63, 103), advantageously loading shoes, for profiling the shell (11, 41, 61, 101), the nip (YN, PN1, KN, PN2, AN) and/or the fibrous web (W) as well as for controlling contact in the nip (YN, PN1, KN, PN2, AN).
2. A shoe roll according to claim 1, **characterized** in that the shoe roll is a middle or intermediate roll (4, 6) in a multi-roll calender, a soft calender or equivalent, and that shoe rows (42, 43; 62, 63) loading and profiling the composite shell (41, 61) of the shoe roll are arranged parallel to the nips (PN1, KN, PN2) defined against the shoe roll.
3. A shoe roll according to claim 1, **characterized** in that both middle or intermediate rolls (4, 6) in a multi-roll calender are composed of the shoe roll, and that shoe rows (42, 43; 62, 63) loading and profiling the composite shell (41, 61) of the shoe roll are arranged parallel to the nips (PN1, KN, PN2) defined against the shoe roll.
4. A shoe roll according to claim 2 or 3, **characterized** in that the shoe rows (42, 43; 62, 63) are uniformly spaced with respect to one another in the circumferential direction of the composite shell (41, 61).
5. A shoe roll according to any one of claims 1 to 3, **characterized** in that the shoe roll is a top roll (1) in a multi-roll or soft calender, and that shoe rows (12) loading and profiling the composite shell (11) of the shoe roll are arranged parallel to a top nip (YN) defined against the shoe roll.

6. A shoe roll according to any one of claims 1 to 3, **characterized** in that the shoe roll is a bottom roll (10) in a multi-roll or soft calender, and that the shoe rows (103) loading and profiling the composite shell (101) of the shoe roll are arranged parallel to a bottom nip (AN) defined against the shoe roll.

5

7. A shoe roll according to any one of claims 1 to 6, **characterized** in that the properties of the composite shell of the shoe roll are achieved by a fibre orientation such that the composite shell is more rigid in the circumferential direction than in the axial direction.

10

8. A shoe roll according to claim 7, **characterized** in that the composite material is selected from a group which advantageously includes: continuous-fibre reinforced plastic; glass fibre; a composite of carbon fibres and/or epoxy.

15

9. A shoe roll according to claim 7, **characterized** in that in order to provide a shell which is more rigid in the circumferential direction in relation to the axial direction of the shoe roll (1, 4, 6, 10), the fibre orientation of the composite material has been accomplished such that a major proportion of the fibres has been wound at an angle of over 45° with respect to the axis of the roll (1, 4, 6, 10).

20

10. A shoe roll according to claim 9, **characterized** in that the angle is advantageously in the range of 70° - 90°.

25

11. A shoe roll according to any one of claims 1 to 10, **characterized** in that the shoe roll (1, 4, 6, 10) is advantageously a hydraulically zone-controlled top roll, intermediate roll, middle roll or bottom roll of a calender, the composite shell (11, 41, 61, 101) of which is supported from a non-rotating central shaft of the roll by means of hydrostatic loading arrangements (12; 42, 43; 62, 63; 103), such as rows of loading shoes, which transfer the nip force directed at the composite shell rotating around the central shaft so as to be carried by the central shaft.

30

12. A shoe roll according to any one of the preceding claims 1 to 11, **characterized** in that, in calender operation, the shoe roll (6, 10) can be separated from nip (PN2, KN) forming contact with a press roll (8) or another shoe roll (4).

5 13. A shoe roll according to any one of the preceding claims 1 to 12 in a calender in which there are two stacks (A,B) of three rolls placed one upon the other such that between the stacks there remains a space which is defined by a bottom roll (4) of the upper stack (A) and by a top roll (6) of the lower stack (B), **characterized** in that said two rolls (4, 6) can be separated from contact with rolls (2, 8) of their own roll stack (A, B) into nip contact  
10 (KN) with each other.



14. A shoe roll according to claim 13, **characterized** in that said two rolls (4, 6) that can be separated from contact are soft-surface rolls.

15 15. A shoe roll according to claim 14, **characterized** in that the top roll (1) of the upper roll stack (A) and the bottom roll (10) of the lower roll stack (B) are also soft-surface rolls and the middle rolls (2, 8) of the roll stacks (A, B) are hard rolls.

20 16. A shoe roll according to claim 15, **characterized** in that the middle rolls (2, 8) are heatable thermo rolls.

25 17. A shoe roll according to any one of the preceding claims 13 to 16, **characterized** in that at least the bottom roll (4) of the upper roll stack (A) and the top roll (6) of the lower roll stack (B) are fixedly mounted on a calender frame (R) such that their shells can be displaced in the direction of the roll stack with respect to supports (13) of the rolls.

18. A calender according to claim 17, **characterized** in that at least the bottom roll (4) of the upper roll stack (A) and the top roll (6) of the lower roll stack (B) are provided with loading members located inside the roll shell.

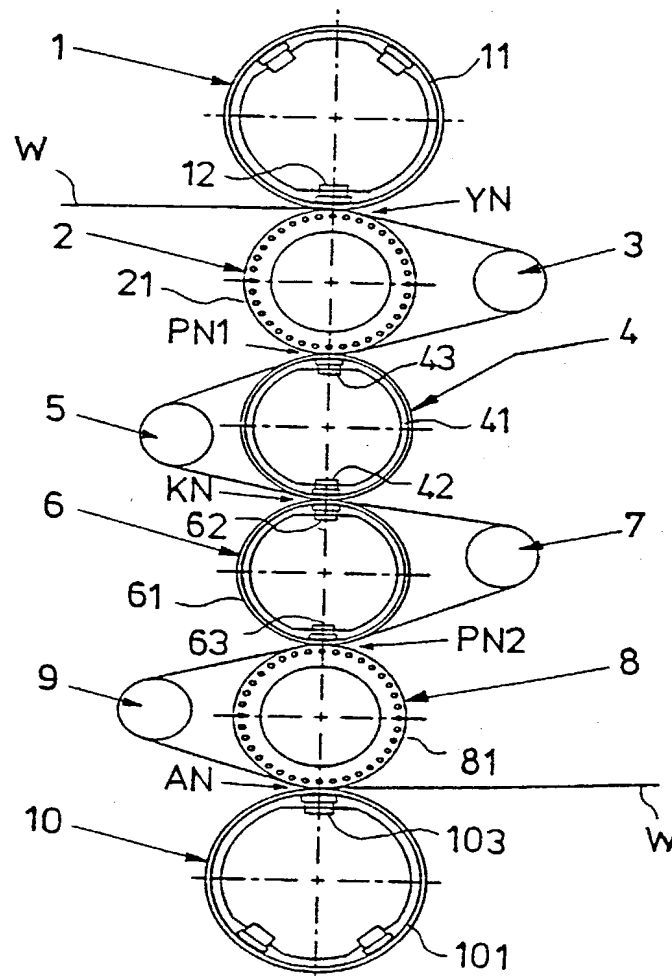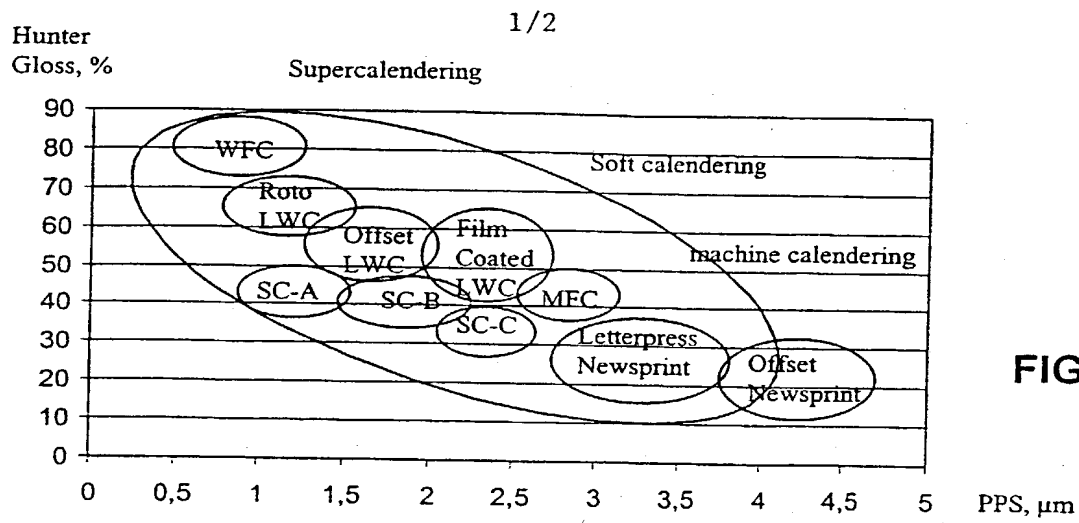



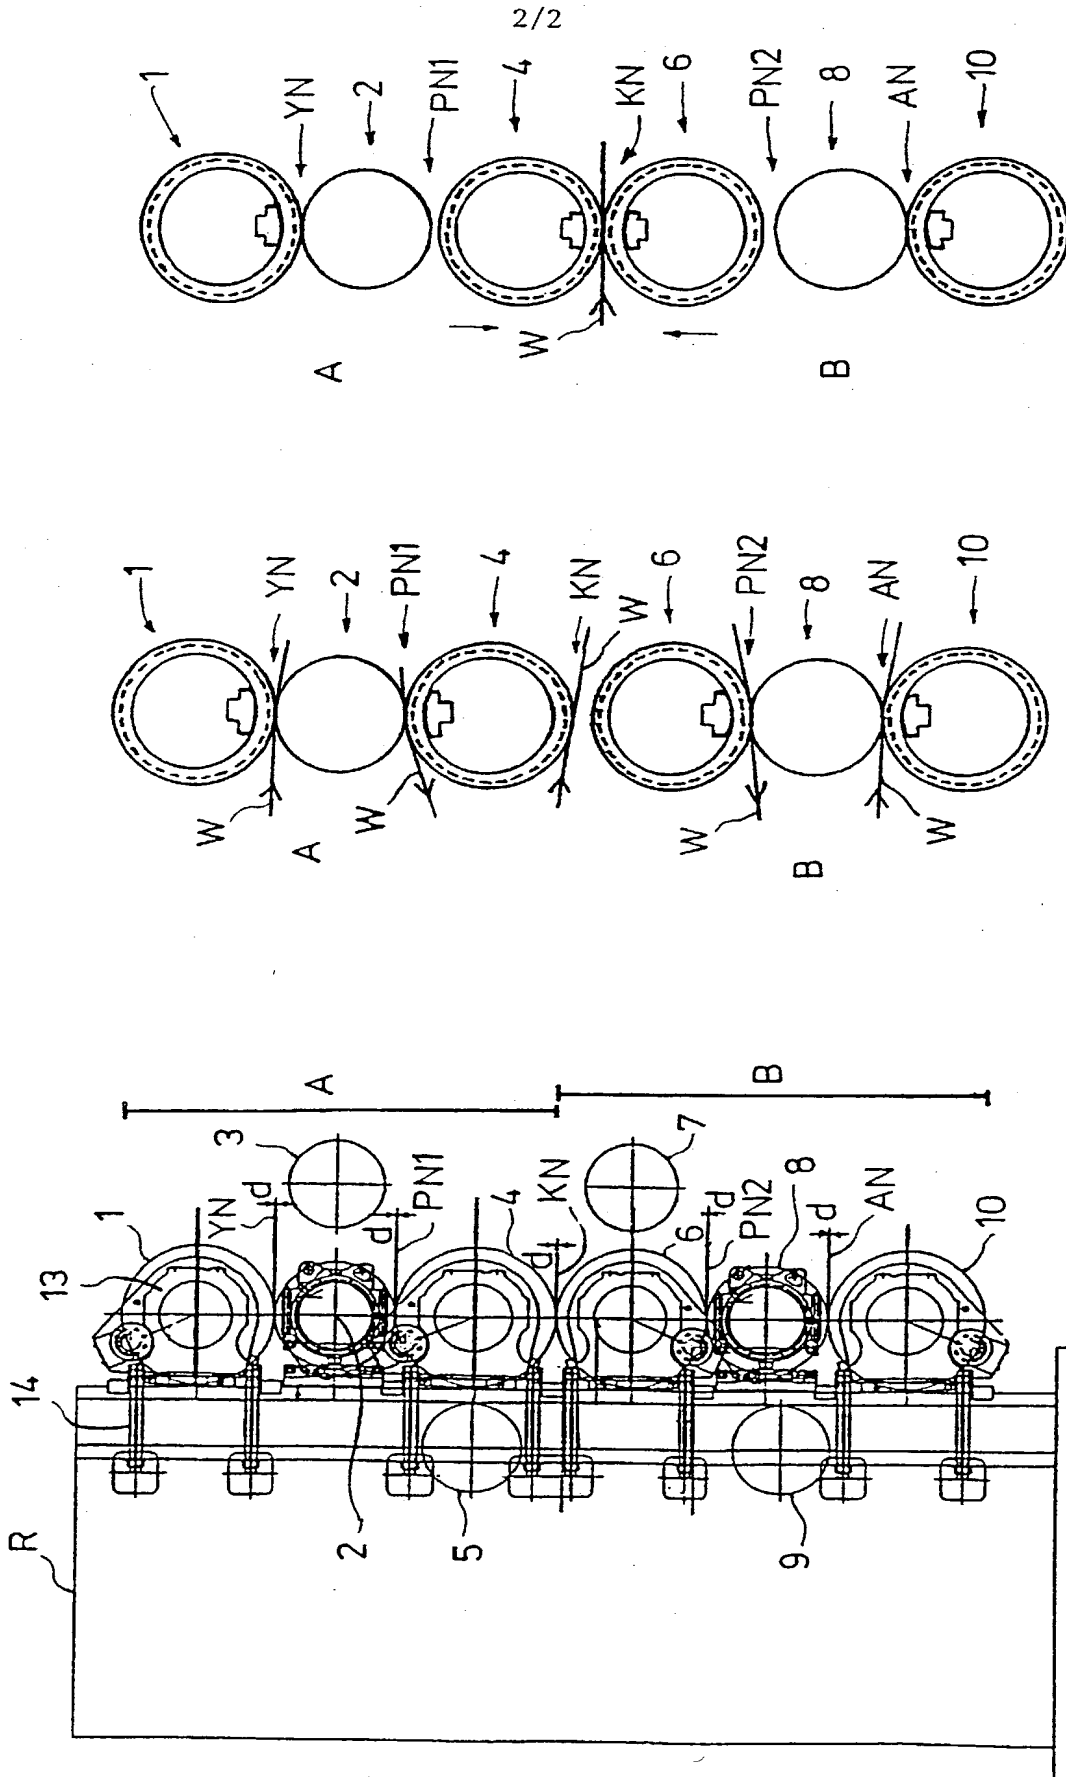


FIG. 3

FIG. 4

FIG. 5

In The United States Patent And Trademark Office

Applicant: Kari Holopainen et al.


Date: February 26, 2002

Date Filed: Simultaneously herewith

Docket No.: FORSAL-36

PCT App. No.: PCT/FI00/00726

For: Shoe Roll
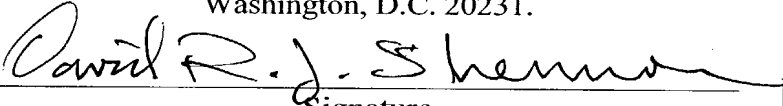
<p align="center"><b>Certificate of Express Mailing</b></p> <p>I hereby certify that this document is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 35 C.F.R. §1.10 on <u>2/26/02</u> with Mailing Label No. <u>EV015 204 33145</u> and is addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231.</p> <p align="center"> Signature</p> <p align="center"><u>David R. J. Stiennon, Reg. No. 33212</u> Name of applicant, assignee or Registered Representative</p>
---

Marked Up Copy of Substitute Specification under 37 C.F.R. 1.125(b)(2)

**TITLE OF THE INVENTION**

Shoe [roll]Roll

**CROSS REFERENCES TO RELATED APPLICATIONS**

5     [0001] This application is a U.S. national stage application of International Application No. PCT/FI00/00726, filed August 25, 2000, and claims priority on Finnish Application No. 19991823 filed August 27, 1999, and on Finnish Application No. 20000399, the disclosures of all of which applications are incorporated by reference herein.

**STATEMENT AS TO RIGHTS TO INVENTIONS MADE UNDER  
FEDERALLY SPONSORED RESEARCH AND DEVELOPMENT**

10     Not applicable.

### **BACKGROUND OF THE INVENTION**

**[0002]** The present invention relates to calendering of a fibrous web, such as a paper and board web. **[ More specifically, the present invention relates to a shoe roll for a multi-roll calender according to the preamble of claim 1.]**

5 **[0003]** Calendering is a method by means of which the properties, in particular the thickness profile, smoothness, gloss, surface porosity and translucence of a web-like material, such as a paper web, are sought to be generally improved. In calendering the paper web is passed into a nip which is formed between rolls pressed against each other and in which the paper web is deformed by the action of temperature,  
10 moisture and nip pressure, in which connection the physical properties of the paper web can be affected by controlling the above-mentioned parameters and the time of action. The good physical properties attained by calendering lead to better print quality, thereby bringing a competitive advantage to the manufacturer of paper.

**[0004]** Shoe and/or extended-nip calendering is calendering in a calender unit in  
15 which a nip is formed between a roll provided with a resilient shell, the shell of said roll being made, for example, of polyurethane, and a press roll or shoe roll which has a rigid shell and is provided with an internal loading shoe and which is made of metal, such as steel.

**[0005]** In a multi-roll calender, the paper web is calendered by passing the web  
20 through nips defined between calender rolls arranged one upon the other to form a stack of rolls. The rolls are mounted on the frame of the calender and they are arranged to be in nip contact with one another such that the paper web can be calendered by passing it through the nips and by arranging a given load between the rolls in order to provide a linear load in the nip. For example, Finnish patent 95062,  
25 which corresponds to US patent 5,590,593, discloses a calender in which the two lowest rolls in a stack formed by four rolls are deflection-compensated rolls, advantageously zone-controlled rolls and they are mounted so as to be stationary, i.e. their bearing housings are rigidly suspended from supports mounted on the frame of

the calender. The two topmost rolls, of which the highest one is also a deflection-compensated roll, preferably a zone-controlled roll, are mounted to be movable such that their bearing housings are attached to loading arms pivotally mounted by means of articulated joints on the frame of the calender. The highest deflection-

5 compensated roll can be provided with a resilient coating and the second topmost roll is a heatable so-called thermo roll. The lowest deflection-compensated roll in the roll stack can also be provided with a resilient coating. The calender has alternative modes of operation, such as, for example, passing the paper web to be calendered through all three nips with the nips closed or, by opening the topmost nips, through

10 only two or one nip, respectively. It is mentioned that the advantages include, among other things, the fact that the calender principally provides all the same advantages as are achieved by conventional soft calenders, in addition to which the middle nip in the calender is a hard nip, by means of which caliper can be equalized. Moreover, the modifiability of the calender makes it suitable for many paper grades.

15 **[0006]** Similar modifiable calenders are also disclosed in European application publication 890676 and in GB application publication 2,119,422. European application publication 890676 discloses a calender in which six rolls are attached to a frame to form a calender stack. The topmost roll is fixedly attached to the frame, the middle rolls are attached to loading arms, and the bottom roll is arranged in a

20 carriage which can be displaced in a vertical direction in a guide. The topmost and lowermost rolls are deflection-compensated rolls, and the topmost and lowermost rolls as well as the two middle rolls are rolls provided with an elastic coating, while the second lowest roll and the second topmost roll are hard-surface rolls. It is typical of the calender that when the topmost and lowermost nips are closed, the other nips

25 therebetween are open, so that the web can be calendered symmetrically by means of the topmost and the lowermost nip and conducted without calendering through the open nips and via the take-out rolls situated adjacent to the rolls which form the opened nips.

**[0007]** GB application publication 2,119,422 in turn relates to an arrangement in

which two stacks of three rolls are placed adjacent to each other on the same calender frame, the middle roll in each of said stacks being a hard roll and fixedly mounted on the frame and the soft rolls situated on both sides of the middle roll being displaceable to an operating position into nip contact with the hard-surface roll and away from it. These rolls situated in both stacks above and beneath the hard roll are deflection-controlled rolls. One of the soft-surface rolls in each roll stack serves only as a spare roll, which can be employed when the soft-surface roll proper which is in nip contact, for instance, becomes damaged, and thus the calender operates in practice as a double nip calender formed by two roll pairs.

**[0008]** Figs. 5D and 5E of US patent 4,332,191 show a calender which comprises two stacks of three rolls placed one upon the other, in which the middle roll in the upper stack is a soft roll and all rolls in the lower stack are hard rolls. Moreover, the calender includes a stack of three rolls on the other side of the frame, the middle roll in the stack being soft. The web can be calendered by passing it via the stacks provided with a soft middle roll or, by lowering the bottom roll of the upper stack into contact with the lower stack, a stack of four hard rolls is provided, and the web is passed through three nips of said stack.

**[0009]** There is also known a soft calender under the name of OPTIGLOSS™, which comprises two separate sets of three rolls, in both of which the middle roll is a hard thermo roll and there is a soft-surface roll on both sides of it. This provides a calender having 6 rolls and 4 nips in all.

**[0010]** As described above, it is typical of all calender structures that nips are opened by means of loading arms or by displacing other support structures supporting the calender roll, such as a carriage supporting the roll in guides extending parallel to the roll stack. This is necessary in order that the nips may be opened when changing the mode of calendering, i.e. the number or location of the nips which are calendering, for example, when the paper grade to be produced is changed. Likewise, it is typical of previous arrangements, like EP890676, that the mode of calendering is changed by opening some

of the nips and by passing the web through the remaining closed nips. This leads to the fact that many rolls have to be moved.

**[0011]** Shoe rolls are typically hydraulically deflection-compensated, zone-controlled rolls in which the shell is supported from a non-rotating central shaft of the roll by means of a hydrostatic loading arrangement, such as a row of loading shoes, which transfer the nip force acting on the shell rotating around the central shaft so as to be carried by the central shaft. The loading element is generally also divided into zones, in which connection the loading pressure can be regulated as required by profiling. The zoning in this kind of zone-controlled shoe roll may comprise individual elements of the loading arrangement, in which connection the number of zones in the roll and in the loading arrangement may exceed 60 [-] as examples may be mentioned the shoe rolls marketed by the **[applicant]Metso Paper, Inc.** under the trademarks **SymCD™** and **SymCDS™**, or the zoning may comprise a group of individual elements of the loading arrangement, in which connection the roll and the loading arrangement normally comprise eight zones [-] as examples may be mentioned the shoe rolls marketed by **[the applicant]Metso Paper, Inc.** under the trademarks **SymZ™**, **SymZS™**, **SymZL™**, and **SymZLC™**.

**[0012]** Shoe and/or extended-nip calendering has generally been found to be good for producing low-gloss paper grades, i.e. having a Hunter gloss % below 40, by calendering. When higher gloss is required, the nip pressure is, however, not sufficient to provide gloss. With ever-increasing running speeds, calendering is becoming a bottleneck in the papermaking process, and satisfactory quality is not achieved by today's machine calender units. Some of the drawbacks of the present papermaking process are also that

- the loss of bulk increases when gloss is improved, and
- in order to provide sufficient quality, it is necessary to use webs with an abundance of coating and/or to use off-line calendering, in particular multi-nip calendering, the known application of which is supercalendering, and/or soft calendering.

**[0013]** The direction in the calendering technology is to an ever increasing degree towards on-line solutions even when the intention is to manufacture higher quality printing paper grades, such as SC and glossy coated papers. Fig. 1 illustrates how different printing paper grades are calendered today and, in particular, it can be seen where the calendering technology is heading in the near future.

**[0014]** a. **Machine calendering** is calendering in a calender unit in which nips are formed between non-resilient smooth-surface metal rolls placed one upon the other. The width of the nip in a machine calender is typically very small and the nip load in the nips is relatively high.

**[0015]** b. **Multi-roll calendering**, the known applications of which include supercalendering and, for producing SC-A and LWC grades in particular, a multi-roll on-line or off-line calender which provides in off-line operation in practice the best result in terms of quality, is calendering in a calender unit in which nips are formed between a smooth-surface metal or cast iron roll and a roll coated with a resilient coating, such as a paper or polymer roll, in which connection a wide nip is formed. The resilient-surface roll conforms to the contours of the surface of paper and presses the opposite side of paper evenly against the smooth-surface metal roll. Because of the resilient-surface roll, the calendering time is also longer, wherefore in order to assure adequate capacity, the paper machine must be equipped today even with three multi-roll calenders. In a multi-roll calender there are today typically from one to two sets of rolls and 10 to 12 nips. For the purpose of treating both sides of the web, the supercalender comprises a so-called reversing nip in which there are two resilient-surface rolls placed against each other. The linear load in the multi-roll calender increases from the top nip to the bottom nip because of the gravity of the earth. By using relief of the rolls, this increase in load can be compensated for. This kind of multi-roll calender provided with the relieving of the rolls is the multi-roll calender marketed by **[the applicant]Metso Paper, Inc.** under the trademark **OptiLoad™**.

**[0016]** c. **Soft calendering** is calendering in a calender unit in which nips are formed in a manner similar to that of a multi-roll or supercalender between a

smooth-surface metal roll and a roll covered with a resilient coating, in which connection a wide nip is formed. In a soft calender, each nip is formed between separate roll pairs, in which connection the nip load in individual nips can be adjusted in each individual nip, or between roll pairs in separate sets of rolls, in which connection the nip load can be adjusted in each individual set of rolls. The soft calender can be used as an on-line calender and it can replace the machine calenders of a paper machine. In order to treat both sides of the web in the calender, the order of the roll pairs or of the sets of rolls forming the successive nips is reverse with respect to the web such that the resilient-surface roll or the resilient-surface rolls can be caused to work on both surfaces of the web.

### **SUMMARY OF THE INVENTION**

**[0017]** One object of the present invention is to eliminate or at least minimize the weaknesses and drawbacks associated with today's multi-roll calendering and to provide a new type of intermediate and/or middle roll for a multi-roll calender in order to improve the profileability of a fibrous web in the nips of a multi-roll calender, such as a multi-nip on-line or off-line calender, supercalender and/or soft calender. Another object of the present invention is to provide a calender that can be modified in a new, simple manner.

**[These objectives are achieved according to the invention by means of a shoe roll of the kind mentioned at the beginning, the principal special features of the shoe roll being set forth in the characterizing part of the accompanying independent claim 1.]**

**[0018]** In the shoe roll according to the invention, the shoe rows loading and profiling the shell of the shoe roll are arranged in the direction of the nips of the shoe roll, and the shell of the shoe roll is made of a composite material, the properties of which are selected with a fibre orientation such that the shell is more rigid in the circumferential direction than in the axial direction.

**[0019]** The calender according to one embodiment of the invention comprises two



stacks of three rolls placed one upon the other, the rolls of the stacks being displaceable so as to provide one operation nip between the middle rolls or two operation nips in both stacks.

**[0020]** Both of the stacks of three rolls placed one upon the other in the same calender frame of the calender have advantageously a thermo roll in the middle and a soft-surface roll above and underneath. The soft-surface rolls are advantageously rolls provided with a movable shell, which means that they can be displaced in the direction of the nip plane by displacing the shells in the radial direction. The movable-shell rolls are fixedly attached to the frame of the calender. In that connection, the lower movable-shell roll in the upper roll stack and the upper movable-shell roll in the lower roll stack can be moved by displacing the shells into nip contact with each other and apart from nip contact with the middle roll of the upper roll stack and the middle roll of the lower roll stack, respectively. Likewise, the top roll in the upper roll stack and the bottom roll in the lower roll stack can be displaced by means of a movement of the roll shell taking place in the direction of the nip plane apart from the middle roll and back into nip contact with the middle roll. The rolls are fixedly attached to the frame at such distances from one another that all the nips can be opened by means of movements of the movable-shell rolls.

**[0021]** With respect to the advantages of the shoe roll according to the invention it may be mentioned that the loading of the nip can be simultaneously changed by means of individual shoes or a group of shoes of the shoe rows which are loading the shell of the shoe roll and which are spaced from one another in the circumferential direction, i.e. the load of the nip can be increased and/or reduced, thereby providing successive nips which profile in the same way and enhance the result of calendering. The invention also makes it possible that all the nips of a multi-roll calender can now be made profiling nips by means of the shoe roll and that the top and/or the bottom roll of a multi-roll calender, such as a supercalender, can now be made a profiling top and/or bottom roll.

**[0022]** In accordance with an embodiment of the invention regarded as particularly

advantageous, the composite material is advantageously selected from a group which includes: continuous[-]fibre reinforced plastic; glass fibre; a composite of carbon fibres and/or epoxy.

**[0023]** In order that the shell should be more rigid in the circumferential direction than in the axial direction, in an embodiment of the invention considered advantageous, the fibre orientation of the composite material has been accomplished such that a major proportion of the fibres has been wound at an angle of over 45° with respect to the axis of the roll. Advantageously, this winding angle is in the range of 70° - 90°.

**[0024]** The invention enables the calender to be modified only by arranging the middle rolls (the top roll in the lower roll stack and the bottom roll in the upper roll stack) into nip contact with each other and apart from each other into nip contact with the middle roll of their own stack. This allows, for example, symmetric calendering to be accomplished in four nips formed by hard-surface and soft-surface rolls while the nip formed between the top calender roll of the lower stack and the bottom roll of the upper stack is open, or matte calendering to be accomplished by passing the web out of the calender through the closed nip between the bottom roll of the upper stack and the top roll of the lower stack. By dimensioning the positioning of the roll shafts, the diameters of the roll shells and the distances of the radial movement of the roll shells in a suitable manner, the change can be accomplished only by displacing roll shells, i.e. separate transfer devices for displacement of the entire roll are not needed.

**[0025]** With respect to the advantages of other details and the structural details of the invention, reference is made to the dependent claims of the accompanying set of claims.

### **BRIEF DESCRIPTION OF THE DRAWINGS**

**[0026]** In the following, the invention will be described in more detail with reference to the accompanying patent drawings, in which

**[0027]** Figure 1 shows how different printing paper grades are calendered today and, in

particular, the direction in which the calendering technology is heading in the near future,

**[0028]** Figure 2 is a schematic sectional view of a multi-roll calender,

**[0029]** Figure 3 is a side view of a calender with nips open,

5 **[0030]** Figure 4 shows a calender in a first running situation, and

**[0031]** Figure 5 shows the calender in a second running situation.

### **DESCRIPTION OF THE PREFERRED EMBODIMENTS**

**[0032]** In the multi-roll calender shown in Fig. 2, the run of a fibrous web which is being calendered is as follows. The fibrous web W which is calendered enters a top nip  
 10 YN between a top roll 1 of the multi-roll calender and an upper rigid-shell press roll 2 provided with a smooth-surface metal or chilled shell 21, from which nip the fibrous web W runs around a guide member 3 (e.g. a guide roll) into an upper profiling nip PN1 between the rigid-shell press roll 2 and an upper intermediate or middle roll 4 according to the invention, which roll is a shoe roll provided with a shell 41 of a composite  
 15 material, after which the fibrous web W runs around a guide member 5 (e.g. a guide roll) into a reversing nip KN between the upper middle roll 4 according to the invention, which roll is a shoe roll, and a lower intermediate or middle roll 6 according to the invention, which roll is a shoe roll and also has a shell 61 of a composite material, after which the fibrous web W runs around a guide member 7 (e.g. a guide roll) into a lower  
 20 profiling nip PN2 between a lower middle roll 6 according to the invention, which roll is a shoe roll, and a lower rigid-shell press roll 8 provided with a smooth-surface metal or chilled shell 81, after which the fibrous web W runs around a guide member 9 (e.g. a guide roll) into a bottom nip AN between the lower rigid-shell press roll 8 and a bottom roll 10 of the calender.

25 **[0033]** The upper middle roll 4 according to the invention comprises, according to the

invention, a composite shell 41 and an upper shoe row 43 and a lower shoe row 42 which are arranged both at the profiling nip PN1 and at the reversing nip KN and which load and profile the upper profiling nip PN1 of the fibrous web, the reversing nip KN of the fibrous web and the composite shell 41. The lower middle roll 6 is substantially  
 5 identical with the upper middle roll 4. Thus, the lower middle roll 6 comprises, according to the invention, a composite shell 61 and an upper shoe row 62 and a lower shoe row 63 which are arranged both at the reversing nip KN and at the profiling nip PN2 and which load and profile the reversing nip KN of the fibrous web, the lower profiling nip PN2 and the composite shell 61.

**[0034]** In order to provide successive profiling nips, which profile in the same way and enhance the result of calendering, the reversing nip KN in the multi-roll calender is preceded by at least one profiling nip PN1 (as shown in Fig. 2) in which the metal or chilled shell 21 of the upper rigid-shell press roll 2 and the composite shell 41 of the upper middle roll 4 according to the invention are placed against each other. In addition,  
 15 for the purpose of enhancing the result of calendering, the reversing nip KN is followed by at least one profiling nip PN2 (as shown in Fig. 2) in which the composite shell 61 of the lower middle roll 6 according to the invention and the metal or chilled shell 81 of the lower rigid-shell press roll 8 are placed against each other.

**[0035]** In accordance with the invention, the properties of the composite material are selected with a fibre orientation such that the composite shell 41, 61 is considerably  
 20 more rigid in the circumferential direction than in the axial direction, with the result that by changing the load of the shoe rows 42, 43, 62, 63, the profiles of the composite shell 41, 61, the profiling nip NP1, NP2 and/or the reversing nip KN can be changed. In that connection it becomes possible, among other things, to control the nip spacing and thus  
 25 the linear load in the profiling nip PN1, PN2 and/or in the reversing nip KN and to correct any profile errors caused by different deflections of the rolls defining the nip by changing the profile of a roll shell or roll shells.

**[0036]** In order to make all the nips of the calender such that they can be profiled and

that they profile the fibrous web W, in the embodiment shown in Fig. 2, in addition to the middle rolls 4 and 6, shells 11 and 101 of the top roll 1 and the bottom roll of the calender, respectively, have also been made of a composite material, which is advantageously the same composite material as the composite material of the shells of the middle rolls 4, 6. Since the top and bottom rolls 1, 10 have also been provided with an internal shoe row 12, 103 loading the shell, the profiles of the composite shell 11, 101, the top nip YN and/or the bottom nip AN can be changed by changing the load of the shoe rows 12, 103. In that connection it becomes possible, among other things, to control the spacing of the nip YN, PN1, KN, PN2, AN and to correct any profile error caused by different deflection of the upper and lower rolls defining the nip by changing the profile of the roll shell.

**[0037]** In accordance with an embodiment of the invention regarded as particularly advantageous, the composite material is selected from a group advantageously including: continuous-fibre reinforced plastic; glass fibre; a composite of carbon fibres and/or epoxy.

**[0038]** In order that the shell should be more rigid in the circumferential direction than in the axial direction, in an embodiment of the invention considered advantageous, the fibre orientation of the composite material has been accomplished such that a major proportion of the fibres has been wound at an angle of over 45° with respect to the axis of the roll 1, 4, 6, 10. Advantageously, this winding angle is in the range of 70° [ - ] 90°.

**[0039]** The shoe roll 1, 4, 6, 10 according to the invention is advantageously a hydraulically zone-controlled top roll, intermediate roll, middle roll or bottom roll of a calender, the composite shell 11, 41, 61, 101 of which roll is supported from a non-rotating central shaft of the roll by means of a hydrostatic loading arrangement 12; 42; 43; 62; 63; 103, such as a row of loading shoes which transfer the nip force acting on the composite shell rotating around the central shaft so as to be carried by the central shaft.

**[0040]** Fig. 3 is a side view of a calender. Six rolls are placed one upon the other on a

frame R of the calender, said rolls forming two stacks A and B of three rolls. In the upper roll stack A, the top and bottom rolls 1 and 4 are rolls provided with a movable shell, the shells of said rolls being displaceable in the radial direction in the direction of the nip plane passing through the axes of rotation of the rolls. The roll shells of said rolls 1 and 4 are soft-surface shells, for example, provided with a polymer coating. Between the top and bottom rolls 1, 4 there is a hard heatable roll 2, i.e. a so-called thermo roll. The surface of this middle roll 2 can be, for example, a smooth metal surface.

**[0041]** In the lower roll stack B, in which the nip plane of the rolls is a continuation of the nip plane of the upper roll stack A, there are rolls which are identical with and in the same order as the rolls in the upper roll stack A, i.e. a middle hard heatable thermo roll 8 and, above and beneath it, a soft-surface movable-shell roll 6 and 10, respectively.

**[0042]** The movable-shell rolls 1, 4, 6, and 10 are so-called Sym-rolls, inside which there are loading members applying a force in a radial direction, which members are located on a stationary shaft and distributed in different zones across the machine width and by means of which the roll shell can be displaced in a radial direction and, in particular, in the direction of the nip plane in order to open and close the nip formed by the roll and to load the roll in a controlled manner.

**[0043]** The movable-shell soft rolls 1, 4, 6, and 10 in both roll stacks A, B have all identical measures and structure, and the middle rolls 3 and 8 in both roll stacks A, B have identical measures and structure, with the result that only two types of rolls need be arranged as spare parts for the calender.

**[0044]** The movable-shell rolls 1, 4, 6, and 10 are attached to the roll frame R by means of supports 13 which have substantially fixed positions and which support the stationary shaft of the roll at both ends. Even though Fig. 3 shows a horizontal bolt 14 for attaching the supports 13 to the calender frame R, other means of attachment can also be used by which the supports can be arranged to be in a fixed position on the frame. The bearing housings of the middle rolls 4 and 6 of the roll stacks A, B can be

attached to the frame R by means of articulation supports and said rolls can be relieved hydraulically according to the known principles concerning sets of articulation rolls at both ends by means of a hydraulic cylinder acting between the bearing housing and the frame.

5 **[0045]** The rolls are placed in two superimposed stacks A, B such that the movable-shell rolls 1, 4, 6, and 10 can be displaced apart from the middle hard rolls 2 and 8, and the bottom roll 4 of the upper roll stack and the top roll 6 of the lower roll stack are not in contact with each other, in which connection all the nips YN, PN1, KN, PN2, AN from top to bottom are open. Fig. 3 shows this situation. The distance d between the roll  
10 shells in the nips can be a few millimetres, for example, below 10 mm.

**[0046]** Fig. 4 shows a first running situation in which both nips YN, PN1 and PN2, AN of each roll stack A, B are closed, i.e. a calendering nip is formed on both sides of the heated thermo roll 2, 8 with the respective soft-surface roll 1, 4, 6, and 10. In other words, the web which is being calendered is run through four nips in total, which are all  
15 nips formed by a soft-surface roll and a hard heated roll. Between the roll stacks, the web runs through the open nip KN. The web will also be calendered symmetrically, i.e. in the first roll stack, the first surface is against a hard hot-surface roll and, in the next stack, the opposite surface is against a hard hot-surface roll. By regulating load and/or temperature, the different sides can also be treated differently in the successive roll  
20 stacks A, B.

**[0047]** Fig. 5 shows a second running situation in which the bottom roll 4 in the upper roll stack A and the top roll 6 in the lower roll stack B have been moved apart from the middle roll 2 and 8 of the respective roll stack, i.e. they have been moved into contact with each other in the direction of the nip plane in order to close the space left between  
25 the roll stacks, whereby the calendering nip KN is formed which is defined by a soft-surface roll on both sides. In this mode of running, the web to calendered is passed only through this nip KN in order to implement matte calendering. In this running mode, the rolls 4 and 6, Sym-rolls, are turned through 180° such that the loading members are

placed at the calendering nip KN. If either roll or both rolls is/are provided with two series of loading members located inside the roll shell at a distance of 180° from each other, the roll need not be turned.

**[0048]** The nip KN can also be formed such that the bottom roll 10 of the lower stack B and the middle roll 8 attached to the frame by means of articulation supports are lowered, with the result that the nip PN2 becomes free, and the bottom roll 4 of the upper stack A is lowered to form the nip KN.

**[0049]** No separate loading cylinders are needed in the calender because loading can be accomplished by means of the loading members located inside the shells of the Sym-rolls (soft-surface rolls 1, 4, 6, 10).

**[0050]** Figs. 3[-]-5 also show take-out rolls 3, 5, 7, 9 typical of the calender, by means of which the web W which is being calendered can be taken out of the nips and which have been placed on both sides of the roll stacks A,B.

**[0051]** On-line calendering of paper is advantageously accomplished by means of the calender described above, in which connection it can be placed in a papermaking line. The calender is short in the machine direction, with the result that it is easy to place in an existing line, for example, in connection with rebuilds. Moreover, a change of the mode of running from the mode of calendering shown in Fig. 4 to the mode of calendering shown in Fig. 5 and vice versa is easy to accomplish.

**[0052]** Above, the invention has been described only by way of example by means of one of its embodiments regarded as advantageous. This is, of course, not intended to limit the invention and, as is clear to a person skilled in the art, many different alternative solutions and modifications are feasible within the inventive idea and its scope of protection defined in the accompanying claims. The wide usability of the present invention in almost all kinds of calendering applications, with the exception of pure machine calendering, shall be particularly noted.



**[0053]** The shoe roll provided with a composite shell according to the invention enables the calender to be run and used with different nip combinations. Some of the nips can be kept open. For example, in the case shown in Fig. 2, the nips AN and PN2 can be left open, in which connection the web W is passed directly from the knip KN to reeling. In that connection, the calender shown in Fig. 2 can be arranged to comprise two nips by feeding pressure only for the shoe 43 in the roll 4 and leaving the shoe 42 without pressure. Thereby, a calender is provided which has two successive nips profiling the web W on the same side. When the shoes 12 and 43 above and beneath the nips YN and PN1 are simultaneously pressed or relieved, two successive nips can be provided which profile the web W in the same way, which enhances the outcome.

I

**Abstract**

**The present invention relates to calendering of a fibrous web. More specifically, the invention relates to a shoe roll for a calender, advantageously a]**

5

**ABSTRACT OF THE DISCLOSURE**

**A** multi-roll calender, [a ]supercalender,[ a] soft calender or equivalent[, **which calender comprises] has at least one nip (YN, PN1, KN, PN2, AN) profiling [the]a fibrous web (W) which is being calendered. [According to the invention,**

10

- **the]A** shoe roll (1, 4, 6, 10) constitutes at least one of the calender rolls which define the nip[,
- **a]. A** shell (11, 41, 61, 101) of the shoe roll is of a composite material, and [
- ]the shoe roll is provided with internal shell-loading shoes (12, 42, 43, 62, 63, 103) for profiling the shell, the nip and/or the fibrous web.[

**(FIG. 2)]**

## In The United States Patent And Trademark Office

Applicant: Kari Holopainen et al.

Date: February 26, 2002

Date Filed: Simultaneously herewith

Docket No.: FORSAL-36

PCT App. No.: PCT/FI00/00726


For: Shoe Roll

**Certificate of Express Mailing**

I hereby certify that this document is being deposited with  
the United States Postal Service "Express Mail Post Office to  
Addressee" service under 35 C.F.R. §1.10

on 2/26/02with Mailing Label No. EV 015 204 331 US

and is addressed to the Assistant Commissioner for Patents,  
Washington, D.C. 20231.

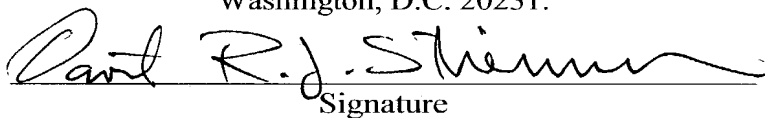

Signature

David R. J. Stiennon, Reg. No. 33212

Name of applicant, assignee or Registered Representative

**Clean Copy of Substitute Specification under 37 C.F.R. 1.125(c)**

## TITLE OF THE INVENTION

Shoe Roll

## CROSS REFERENCES TO RELATED APPLICATIONS

[0001] This application is a U.S. national stage application of International  
Application No. PCT/FI00/00726, filed August 25, 2000, and claims priority on  
Finnish Application No. 19991823 filed August 27, 1999, and on Finnish  
Application No. 20000399, the disclosures of all of which applications are  
incorporated by reference herein.

## STATEMENT AS TO RIGHTS TO INVENTIONS MADE UNDER

## FEDERALLY SPONSORED RESEARCH AND DEVELOPMENT

Not applicable.

## BACKGROUND OF THE INVENTION

[0002] The present invention relates to calendering of a fibrous web, such as a paper and board web.

[0003] Calendering is a method by means of which the properties, in particular the thickness profile, smoothness, gloss, surface porosity and translucence of a web-like material, such as a paper web, are sought to be generally improved. In calendering the paper web is passed into a nip which is formed between rolls pressed against each other and in which the paper web is deformed by the action of temperature, moisture and nip pressure, in which connection the physical properties of the paper web can be affected by controlling the above-mentioned parameters and the time of action. The good physical properties attained by calendering lead to better print quality, thereby bringing a competitive advantage to the manufacturer of paper.

[0004] Shoe and/or extended-nip calendering is calendering in a calender unit in which a nip is formed between a roll provided with a resilient shell, the shell of said roll being made, for example, of polyurethane, and a press roll or shoe roll which has a rigid shell and is provided with an internal loading shoe and which is made of metal, such as steel.

[0005] In a multi-roll calender, the paper web is calendered by passing the web through nips defined between calender rolls arranged one upon the other to form a stack of rolls. The rolls are mounted on the frame of the calender and they are arranged to be in nip contact with one another such that the paper web can be calendered by passing it through the nips and by arranging a given load between the rolls in order to provide a linear load in the nip. For example, Finnish patent 95062, which corresponds to US patent 5,590,593, discloses a calender in which the two lowest rolls in a stack formed by four rolls are deflection-compensated rolls, advantageously zone-controlled rolls and they are mounted so as to be stationary, i.e. their bearing housings are rigidly suspended from supports mounted on the frame of the calender. The two topmost rolls, of which the highest one is also a deflection-

compensated roll, preferably a zone-controlled roll, are mounted to be movable such that their bearing housings are attached to loading arms pivotally mounted by means of articulated joints on the frame of the calender. The highest deflection-  
 compensated roll can be provided with a resilient coating and the second topmost  
 5 roll is a heatable so-called thermo roll. The lowest deflection-compensated roll in the roll stack can also be provided with a resilient coating. The calender has alternative modes of operation, such as, for example, passing the paper web to be calendered through all three nips with the nips closed or, by opening the topmost nips, through only two or one nip, respectively. It is mentioned that the advantages include, among  
 10 other things, the fact that the calender principally provides all the same advantages as are achieved by conventional soft calenders, in addition to which the middle nip in the calender is a hard nip, by means of which caliper can be equalized. Moreover, the modifiability of the calender makes it suitable for many paper grades.

[0006] Similar modifiable calenders are also disclosed in European application  
 15 publication 890676 and in GB application publication 2,119,422. European application publication 890676 discloses a calender in which six rolls are attached to a frame to form a calender stack. The topmost roll is fixedly attached to the frame, the middle rolls are attached to loading arms, and the bottom roll is arranged in a carriage which can be displaced in a vertical direction in a guide. The topmost and  
 20 lowermost rolls are deflection-compensated rolls, and the topmost and lowermost rolls as well as the two middle rolls are rolls provided with an elastic coating, while the second lowest roll and the second topmost roll are hard-surface rolls. It is typical of the calender that when the topmost and lowermost nips are closed, the other nips therebetween are open, so that the web can be calendered symmetrically by means of  
 25 the topmost and the lowermost nip and conducted without calendering through the open nips and via the take-out rolls situated adjacent to the rolls which form the opened nips.

[0007] GB application publication 2,119,422 in turn relates to an arrangement in which two stacks of three rolls are placed adjacent to each other on the same

calender frame, the middle roll in each of said stacks being a hard roll and fixedly mounted on the frame and the soft rolls situated on both sides of the middle roll being displaceable to an operating position into nip contact with the hard-surface roll and away from it. These rolls situated in both stacks above and beneath the hard roll are deflection-controlled rolls. One of the soft-surface rolls in each roll stack serves only as a spare roll, which can be employed when the soft-surface roll proper which is in nip contact, for instance, becomes damaged, and thus the calender operates in practice as a double nip calender formed by two roll pairs.

[0008] Figs. 5D and 5E of US patent 4,332,191 show a calender which comprises two stacks of three rolls placed one upon the other, in which the middle roll in the upper stack is a soft roll and all rolls in the lower stack are hard rolls. Moreover, the calender includes a stack of three rolls on the other side of the frame, the middle roll in the stack being soft. The web can be calendered by passing it via the stacks provided with a soft middle roll or, by lowering the bottom roll of the upper stack into contact with the lower stack, a stack of four hard rolls is provided, and the web is passed through three nips of said stack.

[0009] There is also known a soft calender under the name of OPTIGLOSS™, which comprises two separate sets of three rolls, in both of which the middle roll is a hard thermo roll and there is a soft-surface roll on both sides of it. This provides a calender having 6 rolls and 4 nips in all.

[0010] As described above, it is typical of all calender structures that nips are opened by means of loading arms or by displacing other support structures supporting the calender roll, such as a carriage supporting the roll in guides extending parallel to the roll stack. This is necessary in order that the nips may be opened when changing the mode of calendering, i.e. the number or location of the nips which are calendering, for example, when the paper grade to be produced is changed. Likewise, it is typical of previous arrangements, like EP890676, that the mode of calendering is changed by opening some of the nips and by passing the web through the remaining closed nips. This leads to the

fact that many rolls have to be moved.

[0011] Shoe rolls are typically hydraulically deflection-compensated, zone-controlled rolls in which the shell is supported from a non-rotating central shaft of the roll by means of a hydrostatic loading arrangement, such as a row of loading shoes, which transfer the nip force acting on the shell rotating around the central shaft so as to be carried by the central shaft. The loading element is generally also divided into zones, in which connection the loading pressure can be regulated as required by profiling. The zoning in this kind of zone-controlled shoe roll may comprise individual elements of the loading arrangement, in which connection the number of zones in the roll and in the loading arrangement may exceed 60 – as examples may be mentioned the shoe rolls marketed by the Metso Paper, Inc. under the trademarks **SymCD™** and **SymCDS™**, or the zoning may comprise a group of individual elements of the loading arrangement, in which connection the roll and the loading arrangement normally comprise eight zones – as examples may be mentioned the shoe rolls marketed by Metso Paper, Inc. under the trademarks **SymZ™**, **SymZS™**, **SymZL™**, and **SymZLC™**.

[0012] Shoe and/or extended-nip calendering has generally been found to be good for producing low-gloss paper grades, i.e. having a Hunter gloss % below 40, by calendering. When higher gloss is required, the nip pressure is, however, not sufficient to provide gloss. With ever-increasing running speeds, calendering is becoming a bottleneck in the papermaking process, and satisfactory quality is not achieved by today's machine calender units. Some of the drawbacks of the present papermaking process are also that

- the loss of bulk increases when gloss is improved, and
- in order to provide sufficient quality, it is necessary to use webs with an abundance of coating and/or to use off-line calendering, in particular multi-nip calendering, the known application of which is supercalendering, and/or soft calendering.

[0013] The direction in the calendering technology is to an ever increasing degree towards on-line solutions even when the intention is to manufacture higher quality

printing paper grades, such as SC and glossy coated papers. Fig. 1 illustrates how different printing paper grades are calendered today and, in particular, it can be seen where the calendering technology is heading in the near future.

[0014] a. **Machine calendering** is calendering in a calender unit in which nips  
 5 are formed between non-resilient smooth-surface metal rolls placed one upon the other. The width of the nip in a machine calender is typically very small and the nip load in the nips is relatively high.

[0015] b. **Multi-roll calendering**, the known applications of which include  
 10 supercalendering and, for producing SC-A and LWC grades in particular, a multi-roll on-line or off-line calender which provides in off-line operation in practice the best result in terms of quality, is calendering in a calender unit in which nips are formed between a smooth-surface metal or cast iron roll and a roll coated with a resilient coating, such as a paper or polymer roll, in which connection a wide nip is formed. The resilient-surface roll conforms to the contours of the surface of paper  
 15 and presses the opposite side of paper evenly against the smooth-surface metal roll. Because of the resilient-surface roll, the calendering time is also longer, wherefore in order to assure adequate capacity, the paper machine must be equipped today even with three multi-roll calenders. In a multi-roll calender there are today typically from one to two sets of rolls and 10 to 12 nips. For the purpose of treating  
 20 both sides of the web, the supercalender comprises a so-called reversing nip in which there are two resilient-surface rolls placed against each other. The linear load in the multi-roll calender increases from the top nip to the bottom nip because of the gravity of the earth. By using relief of the rolls, this increase in load can be compensated for. This kind of multi-roll calender provided with the relieving of the  
 25 rolls is the multi-roll calender marketed by Metso Paper, Inc. under the trademark **OptiLoad™**.

[0016] c. **Soft calendering** is calendering in a calender unit in which nips are  
 30 formed in a manner similar to that of a multi-roll or supercalender between a smooth-surface metal roll and a roll covered with a resilient coating, in which connection a wide nip is formed. In a soft calender, each nip is formed between



separate roll pairs, in which connection the nip load in individual nips can be adjusted in each individual nip, or between roll pairs in separate sets of rolls, in which connection the nip load can be adjusted in each individual set of rolls. The soft calender can be used as an on-line calender and it can replace the machine  
 5 calenders of a paper machine. In order to treat both sides of the web in the calender, the order of the roll pairs or of the sets of rolls forming the successive nips is reverse with respect to the web such that the resilient-surface roll or the resilient-surface rolls can be caused to work on both surfaces of the web.

#### SUMMARY OF THE INVENTION

10 [0017] One object of the present invention is to eliminate or at least minimize the weaknesses and drawbacks associated with today's multi-roll calendering and to provide a new type of intermediate and/or middle roll for a multi-roll calender in order to improve the profileability of a fibrous web in the nips of a multi-roll calender, such as a multi-nip on-line or off-line calender, supercalender and/or soft calender. Another object  
 15 of the present invention is to provide a calender that can be modified in a new, simple manner.

[0018] In the shoe roll according to the invention, the shoe rows loading and profiling the shell of the shoe roll are arranged in the direction of the nips of the shoe roll, and the shell of the shoe roll is made of a composite material, the properties of which are  
 20 selected with a fibre orientation such that the shell is more rigid in the circumferential direction than in the axial direction.

[0019] The calender according to one embodiment of the invention comprises two stacks of three rolls placed one upon the other, the rolls of the stacks being displaceable so as to provide one operation nip between the middle rolls or two operation nips in both  
 25 stacks.

[0020] Both of the stacks of three rolls placed one upon the other in the same calender frame of the calender have advantageously a thermo roll in the middle and a soft-surface

roll above and underneath. The soft-surface rolls are advantageously rolls provided with a movable shell, which means that they can be displaced in the direction of the nip plane by displacing the shells in the radial direction. The movable-shell rolls are fixedly attached to the frame of the calender. In that connection, the lower movable-shell roll in the upper roll stack and the upper movable-shell roll in the lower roll stack can be moved by displacing the shells into nip contact with each other and apart from nip contact with the middle roll of the upper roll stack and the middle roll of the lower roll stack, respectively. Likewise, the top roll in the upper roll stack and the bottom roll in the lower roll stack can be displaced by means of a movement of the roll shell taking place in the direction of the nip plane apart from the middle roll and back into nip contact with the middle roll. The rolls are fixedly attached to the frame at such distances from one another that all the nips can be opened by means of movements of the movable-shell rolls.

[0021] With respect to the advantages of the shoe roll according to the invention it may be mentioned that the loading of the nip can be simultaneously changed by means of individual shoes or a group of shoes of the shoe rows which are loading the shell of the shoe roll and which are spaced from one another in the circumferential direction, i.e. the load of the nip can be increased and/or reduced, thereby providing successive nips which profile in the same way and enhance the result of calendering. The invention also makes it possible that all the nips of a multi-roll calender can now be made profiling nips by means of the shoe roll and that the top and/or the bottom roll of a multi-roll calender, such as a supercalender, can now be made a profiling top and/or bottom roll:

[0022] In accordance with an embodiment of the invention regarded as particularly advantageous, the composite material is advantageously selected from a group which includes: continuous-fibre reinforced plastic; glass fibre; a composite of carbon fibres and/or epoxy.

[0023] In order that the shell should be more rigid in the circumferential direction than in the axial direction, in an embodiment of the invention considered advantageous, the

fibre orientation of the composite material has been accomplished such that a major proportion of the fibres has been wound at an angle of over 45° with respect to the axis of the roll. Advantageously, this winding angle is in the range of 70°–90°.

[0024] The invention enables the calender to be modified only by arranging the middle rolls (the top roll in the lower roll stack and the bottom roll in the upper roll stack) into nip contact with each other and apart from each other into nip contact with the middle roll of their own stack. This allows, for example, symmetric calendering to be accomplished in four nips formed by hard-surface and soft-surface rolls while the nip formed between the top calender roll of the lower stack and the bottom roll of the upper stack is open, or matte calendering to be accomplished by passing the web out of the calender through the closed nip between the bottom roll of the upper stack and the top roll of the lower stack. By dimensioning the positioning of the roll shafts, the diameters of the roll shells and the distances of the radial movement of the roll shells in a suitable manner, the change can be accomplished only by displacing roll shells, i.e. separate transfer devices for displacement of the entire roll are not needed.

[0025] With respect to the advantages of other details and the structural details of the invention, reference is made to the dependent claims of the accompanying set of claims.

#### BRIEF DESCRIPTION OF THE DRAWINGS

[0026] In the following, the invention will be described in more detail with reference to the accompanying patent drawings, in which

[0027] Figure 1 shows how different printing paper grades are calendered today and, in particular, the direction in which the calendering technology is heading in the near future,

[0028] Figure 2 is a schematic sectional view of a multi-roll calender,

[0029] Figure 3 is a side view of a calender with nips open,

[0030] Figure 4 shows a calender in a first running situation, and

[0031] Figure 5 shows the calender in a second running situation.

#### DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0032] In the multi-roll calender shown in Fig. 2, the run of a fibrous web which is being calendered is as follows. The fibrous web W which is calendered enters a top nip YN between a top roll 1 of the multi-roll calender and an upper rigid-shell press roll 2 provided with a smooth-surface metal or chilled shell 21, from which nip the fibrous web W runs around a guide member 3 (e.g. a guide roll) into an upper profiling nip PN1 between the rigid-shell press roll 2 and an upper intermediate or middle roll 4 according to the invention, which roll is a shoe roll provided with a shell 41 of a composite material, after which the fibrous web W runs around a guide member 5 (e.g. a guide roll) into a reversing nip KN between the upper middle roll 4 according to the invention, which roll is a shoe roll, and a lower intermediate or middle roll 6 according to the invention, which roll is a shoe roll and also has a shell 61 of a composite material, after which the fibrous web W runs around a guide member 7 (e.g. a guide roll) into a lower profiling nip PN2 between a lower middle roll 6 according to the invention, which roll is a shoe roll, and a lower rigid-shell press roll 8 provided with a smooth-surface metal or chilled shell 81, after which the fibrous web W runs around a guide member 9 (e.g. a guide roll) into a bottom nip AN between the lower rigid-shell press roll 8 and a bottom roll 10 of the calender.

[0033] The upper middle roll 4 according to the invention comprises, according to the invention, a composite shell 41 and an upper shoe row 43 and a lower shoe row 42 which are arranged both at the profiling nip PN1 and at the reversing nip KN and which load and profile the upper profiling nip PN1 of the fibrous web, the reversing nip KN of the fibrous web and the composite shell 41. The lower middle roll 6 is substantially identical with the upper middle roll 4. Thus, the lower middle roll 6 comprises, according to the invention, a composite shell 61 and an upper shoe row 62 and a lower shoe row 63 which are arranged both at the reversing nip KN and at the profiling nip

PN2 and which load and profile the reversing nip KN of the fibrous web, the lower profiling nip PN2 and the composite shell 61.

[0034] In order to provide successive profiling nips, which profile in the same way and enhance the result of calendering, the reversing nip KN in the multi-roll calender is preceded by at least one profiling nip PN1 (as shown in Fig. 2) in which the metal or chilled shell 21 of the upper rigid-shell press roll 2 and the composite shell 41 of the upper middle roll 4 according to the invention are placed against each other. In addition, for the purpose of enhancing the result of calendering, the reversing nip KN is followed by at least one profiling nip PN2 (as shown in Fig. 2) in which the composite shell 61 of the lower middle roll 6 according to the invention and the metal or chilled shell 81 of the lower rigid-shell press roll 8 are placed against each other.

[0035] In accordance with the invention, the properties of the composite material are selected with a fibre orientation such that the composite shell 41, 61 is considerably more rigid in the circumferential direction than in the axial direction, with the result that by changing the load of the shoe rows 42, 43, 62, 63, the profiles of the composite shell 41, 61, the profiling nip NP1, NP2 and/or the reversing nip KN can be changed. In that connection it becomes possible, among other things, to control the nip spacing and thus the linear load in the profiling nip PN1, PN2 and/or in the reversing nip KN and to correct any profile errors caused by different deflections of the rolls defining the nip by changing the profile of a roll shell or roll shells.

[0036] In order to make all the nips of the calender such that they can be profiled and that they profile the fibrous web W, in the embodiment shown in Fig. 2, in addition to the middle rolls 4 and 6, shells 11 and 101 of the top roll 1 and the bottom roll of the calender, respectively, have also been made of a composite material, which is advantageously the same composite material as the composite material of the shells of the middle rolls 4, 6. Since the top and bottom rolls 1, 10 have also been provided with an internal shoe row 12, 103 loading the shell, the profiles of the composite shell 11, 101, the top nip YN and/or the bottom nip AN can be changed by changing the load of

the shoe rows 12, 103. In that connection it becomes possible, among other things, to control the spacing of the nip YN, PN1, KN, PN2, AN and to correct any profile error caused by different deflection of the upper and lower rolls defining the nip by changing the profile of the roll shell.

5 [0037] In accordance with an embodiment of the invention regarded as particularly advantageous, the composite material is selected from a group advantageously including: continuous-fibre reinforced plastic; glass fibre; a composite of carbon fibres and/or epoxy.

10 [0038] In order that the shell should be more rigid in the circumferential direction than in the axial direction, in an embodiment of the invention considered advantageous, the fibre orientation of the composite material has been accomplished such that a major proportion of the fibres has been wound at an angle of over 45° with respect to the axis of the roll 1, 4, 6, 10. Advantageously, this winding angle is in the range of 70°–90°.

15 [0039] The shoe roll 1, 4, 6, 10 according to the invention is advantageously a hydraulically zone-controlled top roll, intermediate roll, middle roll or bottom roll of a calender, the composite shell 11, 41, 61, 101 of which roll is supported from a non-rotating central shaft of the roll by means of a hydrostatic loading arrangement 12; 42; 43; 62; 63; 103, such as a row of loading shoes which transfer the nip force acting on the composite shell rotating around the central shaft so as to be carried by the central shaft.

20 [0040] Fig. 3 is a side view of a calender. Six rolls are placed one upon the other on a frame R of the calender, said rolls forming two stacks A and B of three rolls. In the upper roll stack A, the top and bottom rolls 1 and 4 are rolls provided with a movable shell, the shells of said rolls being displaceable in the radial direction in the direction of the nip plane passing through the axes of rotation of the rolls. The roll shells of said rolls  
25 1 and 4 are soft-surface shells, for example, provided with a polymer coating. Between the top and bottom rolls 1, 4 there is a hard heatable roll 2, i.e. a so-called thermo roll. The surface of this middle roll 2 can be, for example, a smooth metal surface.

[0041] In the lower roll stack B, in which the nip plane of the rolls is a continuation of the nip plane of the upper roll stack A, there are rolls which are identical with and in the same order as the rolls in the upper roll stack A, i.e. a middle hard heatable thermo roll 8 and, above and beneath it, a soft-surface movable-shell roll 6 and 10, respectively.

5 [0042] The movable-shell rolls 1, 4, 6, and 10 are so-called Sym-rolls, inside which there are loading members applying a force in a radial direction, which members are located on a stationary shaft and distributed in different zones across the machine width and by means of which the roll shell can be displaced in a radial direction and, in particular, in the direction of the nip plane in order to open and close the nip formed by  
10 the roll and to load the roll in a controlled manner.

[0043] The movable-shell soft rolls 1, 4, 6, and 10 in both roll stacks A, B have all identical measures and structure, and the middle rolls 3 and 8 in both roll stacks A, B have identical measures and structure, with the result that only two types of rolls need be arranged as spare parts for the calender.

15 [0044] The movable-shell rolls 1, 4, 6, and 10 are attached to the roll frame R by means of supports 13 which have substantially fixed positions and which support the stationary shaft of the roll at both ends. Even though Fig. 3 shows a horizontal bolt 14 for attaching the supports 13 to the calender frame R, other means of attachment can also be used by which the supports can be arranged to be in a fixed position on the  
20 frame. The bearing housings of the middle rolls 4 and 6 of the roll stacks A, B can be attached to the frame R by means of articulation supports and said rolls can be relieved hydraulically according to the known principles concerning sets of articulation rolls at both ends by means of a hydraulic cylinder acting between the bearing housing and the frame.

25 [0045] The rolls are placed in two superimposed stacks A, B such that the movable-shell rolls 1, 4, 6, and 10 can be displaced apart from the middle hard rolls 2 and 8, and the bottom roll 4 of the upper roll stack and the top roll 6 of the lower roll stack are not

in contact with each other, in which connection all the nips YN, PN1, KN, PN2, AN from top to bottom are open. Fig. 3 shows this situation. The distance d between the roll shells in the nips can be a few millimetres, for example, below 10 mm.

[0046] Fig. 4 shows a first running situation in which both nips YN, PN1 and PN2, AN of each roll stack A, B are closed, i.e. a calendering nip is formed on both sides of the heated thermo roll 2, 8 with the respective soft-surface roll 1, 4, 6, and 10. In other words, the web which is being calendered is run through four nips in total, which are all nips formed by a soft-surface roll and a hard heated roll. Between the roll stacks, the web runs through the open nip KN. The web will also be calendered symmetrically, i.e. in the first roll stack, the first surface is against a hard hot-surface roll and, in the next stack, the opposite surface is against a hard hot-surface roll. By regulating load and/or temperature, the different sides can also be treated differently in the successive roll stacks A, B.

[0047] Fig. 5 shows a second running situation in which the bottom roll 4 in the upper roll stack A and the top roll 6 in the lower roll stack B have been moved apart from the middle roll 2 and 8 of the respective roll stack, i.e. they have been moved into contact with each other in the direction of the nip plane in order to close the space left between the roll stacks, whereby the calendering nip KN is formed which is defined by a soft-surface roll on both sides. In this mode of running, the web to calendered is passed only through this nip KN in order to implement matte calendering. In this running mode, the rolls 4 and 6, Sym-rolls, are turned through 180° such that the loading members are placed at the calendering nip KN. If either roll or both rolls is/are provided with two series of loading members located inside the roll shell at a distance of 180° from each other, the roll need not be turned.

[0048] The nip KN can also be formed such that the bottom roll 10 of the lower stack B and the middle roll 8 attached to the frame by means of articulation supports are lowered, with the result that the nip PN2 becomes free, and the bottom roll 4 of the upper stack A is lowered to form the nip KN.



[0049] No separate loading cylinders are needed in the calender because loading can be accomplished by means of the loading members located inside the shells of the Sym-rolls (soft-surface rolls 1, 4, 6, 10).

5 [0050] Figs. 3–5 also show take-out rolls 3, 5, 7, 9 typical of the calender, by means of which the web W which is being calendered can be taken out of the nips and which have been placed on both sides of the roll stacks A,B.

[0051] On-line calendering of paper is advantageously accomplished by means of the calender described above, in which connection it can be placed in a papermaking line. The calender is short in the machine direction, with the result that it is easy to place in an  
10 existing line, for example, in connection with rebuilds. Moreover, a change of the mode of running from the mode of calendering shown in Fig. 4 to the mode of calendering shown in Fig. 5 and vice versa is easy to accomplish.

[0052] Above, the invention has been described only by way of example by means of one of its embodiments regarded as advantageous. This is, of course, not intended to  
15 limit the invention and, as is clear to a person skilled in the art, many different alternative solutions and modifications are feasible within the inventive idea and its scope of protection defined in the accompanying claims. The wide usability of the present invention in almost all kinds of calendering applications, with the exception of pure machine calendering, shall be particularly noted.

20 [0053] The shoe roll provided with a composite shell according to the invention enables the calender to be run and used with different nip combinations. Some of the nips can be kept open. For example, in the case shown in Fig. 2, the nips AN and PN2 can be left open, in which connection the web W is passed directly from the knip KN to reeling. In that connection, the calender shown in Fig. 2 can be arranged to comprise two  
25 nips by feeding pressure only for the shoe 43 in the roll 4 and leaving the shoe 42 without pressure. Thereby, a calender is provided which has two successive nips profiling the web W on the same side. When the shoes 12 and 43 above and beneath the

nips YN and PN1 are simultaneously pressed or relieved, two successive nips can be provided which profile the web W in the same way, which enhances the outcome.

## ABSTRACT OF THE DISCLOSURE

A multi-roll calender, supercalender, soft calender or equivalent has at least one nip (YN, PN1, KN, PN2, AN) profiling a fibrous web (W) which is being calendered. A shoe roll (1, 4, 6, 10) constitutes at least one of the calender rolls which define the nip. A  
5 shell (11, 41, 61, 101) of the shoe roll is of a composite material, and the shoe roll is provided with internal shell-loading shoes (12, 42, 43, 62, 63, 103) for profiling the shell, the nip and/or the fibrous web.

10070024/10/070024  
03 September 2002

Please type a plus sign (+) inside this box → ☐

PTO/SB/81 (02-01)

Approved for use through 10/31/2002. OMB 0651-0035

U.S. Patent and Trademark Office, DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

<b>POWER OF ATTORNEY OR AUTHORIZATION OF AGENT</b>	<b>Application Number</b>	PCT/FI00/00726
	<b>Filing Date</b>	August 25, 2000
	<b>First Named Inventor</b>	Kari Holopainen
	<b>Title</b>	Shoe Roll
	<b>Group Art Unit</b>	
	<b>Examiner Name</b>	
	<b>Attorney Docket Number</b>	FORSAL-36

I hereby appoint:

☒ Practitioners at Customer Number 020,455 →

Place Customer  
Number Bar Code  
Label here

OR

☐ Practitioner(s) named below:

Name	Registration Number

as my/our attorney(s) or agent(s) to prosecute the application identified above, and to transact all business in the United States Patent and Trademark Office connected therewith.

Please change the correspondence address for the above-identified application to:

☐ The above-mentioned Customer Number.

OR

☐ Practitioners at Customer Number →

Place Customer  
Number Bar Code  
Label here

☐ Firm or  
Individual Name

Address

Address

City

State

Zip

Country

Telephone


Fax

I am the:

☒ Applicant/Inventor.

☐ Assignee of record of the entire interest. See 37 CFR 3.71.  
Statement under 37 CFR 3.73(b) is enclosed. (Form PTO/SB/96).

**SIGNATURE of Applicant or Assignee of Record**

<b>Name</b>	Kari Holopainen
<b>Signature</b>	
<b>Date</b>	19-03-2002

NOTE: Signatures of all the inventors or assignees of record of the entire interest or their representative(s) are required. Submit multiple forms if more than one signature is required, see below\*.

☒ \*Total of 5 forms are submitted.

Burden Hour Statement: This form is estimated to take 3 minutes to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

Please type a plus sign (+) inside this box → ☐

PTO/SB/81 (02-01)

Approved for use through 10/31/2002. OMB 0651-0035

U.S. Patent and Trademark Office, DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

**POWER OF ATTORNEY OR  
AUTHORIZATION OF AGENT**

Application Number	PCT/FI00/00726
Filing Date	August 25, 2000
First Named Inventor	Kari Holopainen
Title	Shoe Roll
Group Art Unit	
Examiner Name	
Attorney Docket Number	FORSAL-36

I hereby appoint:

☒ Practitioners at Customer Number 020,455 →

OR

☐ Practitioner(s) named below:

Name	Registration Number

Place Customer  
Number Bar Code  
Label here

as my/our attorney(s) or agent(s) to prosecute the application identified above, and to transact all business in the United States Patent and Trademark Office connected therewith.

Please change the correspondence address for the above-identified application to:

☐ The above-mentioned Customer Number.

OR

☐ Practitioners at Customer Number 

OR

Place Customer  
Number Bar Code  
Label here☐ Firm or  
Individual Name

Address

Address

City

State

Zip

Country

Telephone

Fax


I am the:

☒ Applicant/Inventor.☐ Assignee of record of the entire interest. See 37 CFR 3.71.  
Statement under 37 CFR 3.73(b) is enclosed. (Form PTO/SB/96).**SIGNATURE of Applicant or Assignee of Record**

Name

Markku Kyytsönen

Signature



Date

4.4.2002

NOTE: Signatures of all the inventors or assignees of record of the entire interest or their representative(s) are required. Submit multiple forms if more than one signature is required, see below\*.

☒ \*Total of 5 forms are submitted.

Burden Hour Statement: This form is estimated to take 3 minutes to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

Please type a plus sign (+) inside this box → ☐

PTO/SB/81 (02-01)

Approved for use through 10/31/2002. OMB 0651-0035

U.S. Patent and Trademark Office, DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

<b>POWER OF ATTORNEY OR AUTHORIZATION OF AGENT</b>	<b>Application Number</b>	PCT/FI00/00726
	<b>Filing Date</b>	August 25, 2000
	<b>First Named Inventor</b>	Kari Holopainen
	<b>Title</b>	Shoe Roll
	<b>Group Art Unit</b>	
	<b>Examiner Name</b>	
	<b>Attorney Docket Number</b>	FORSAL-36

I hereby appoint:

☒ Practitioners at Customer Number  → 

Place Customer  
Number Bar Code  
Label here

OR

☐ Practitioner(s) named below:

Name	Registration Number

as my/our attorney(s) or agent(s) to prosecute the application identified above, and to transact all business in the United States Patent and Trademark Office connected therewith.

Please change the correspondence address for the above-identified application to:

☐ The above-mentioned Customer Number.

OR

☐ Practitioners at Customer Number  → 

Place Customer  
Number Bar Code  
Label here

OR

☐ Firm or Individual Name

Address

Address

City State Zip

Country


Telephone Fax

I am the:

☒ Applicant/Inventor.

☐ Assignee of record of the entire interest. See 37 CFR 3.71.  
Statement under 37 CFR 3.73(b) is enclosed. (Form PTO/SB/96).

**SIGNATURE of Applicant or Assignee of Record**

<b>Name</b>	Hannu Pullinen
<b>Signature</b>	
<b>Date</b>	8.4. 2002

NOTE: Signatures of all the inventors or assignees of record of the entire interest or their representative(s) are required. Submit multiple forms if more than one signature is required, see below\*.

☒ \*Total of 5 forms are submitted.

Burden Hour Statement: This form is estimated to take 3 minutes to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

Please type a plus sign (+) inside this box → ☐

PTO/SB/81 (02-01)

Approved for use through 10/31/2002. OMB 0651-0035

U.S. Patent and Trademark Office, DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it display a valid OMB control number.

**POWER OF ATTORNEY OR  
AUTHORIZATION OF AGENT**

Application Number	PCT/FI00/00726
Filing Date	August 25, 2000
First Named Inventor	Kari Holopainen
Title	Shoe Roll
Group Art Unit	
Examiner Name	
Attorney Docket Number	FORSAL-36

I hereby appoint:

☒ Practitioners at Customer Number 
OR  
☐ Practitioner(s) named below:Place Customer  
Number Bar Code  
Label here

Name	Registration Number

as my/our attorney(s) or agent(s) to prosecute the application identified above, and to transact all business in the United States Patent and Trademark Office connected therewith.

Please change the correspondence address for the above-identified application to:

☐ The above-mentioned Customer Number.

OR

☐ Practitioners at Customer Number 

OR

Place Customer  
Number Bar Code  
Label here☐ Firm or  
Individual Name

Address

Address

City

State

Zip

Country

Telephone

Fax

I am the:

☒ Applicant/Inventor.☐ Assignee of record of the entire interest. See 37 CFR 3.71.  
Statement under 37 CFR 3.73(b) is enclosed. (Form PTO/SB/96).**SIGNATURE of Applicant or Assignee of Record**

Name

Aaron Mannio

Signature

*Aaron Mannio*


Date

4.4. 2002

NOTE: Signatures of all the inventors or assignees of record of the entire interest or their representative(s) are required. Submit multiple forms if more than one signature is required, see below\*.

☒ \*Total of 5 forms are submitted.

Burden Hour Statement: This form is estimated to take 3 minutes to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

Please type a plus sign (+) inside this box 

PTO/SB/81 (02-01)

Approved for use through 10/31/2002. OMB 0651-0035

U.S. Patent and Trademark Office; DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it display a valid OMB control number.

**POWER OF ATTORNEY OR  
AUTHORIZATION OF AGENT**

Application Number	PCT/FI00/00726
Filing Date	August 25, 2000
First Named Inventor	Kari Holopainen
Title	Shoe Roll
Group Art Unit	
Examiner Name	
Attorney Docket Number	FORSAL-36

I hereby appoint:

☒ Practitioners at Customer Number

020,455

Place Customer  
Number Bar Code  
Label here
☐ Practitioner(s) named below:

Name	Registration Number

as my/our attorney(s) or agent(s) to prosecute the application identified above, and to transact all business in the United States Patent and Trademark Office connected therewith.

Please change the correspondence address for the above-identified application to:

☐ The above-mentioned Customer Number.

OR

☐ Practitioners at Customer Number
Place Customer  
Number Bar Code  
Label here

OR

☐ Firm or  
Individual Name

Address

Address

City

State

Zip

Country

Telephone

Fax

I am the:


☒ Applicant/Inventor.

☐ Assignee of record of the entire interest. See 37 CFR 3.71.  
Statement under 37 CFR 3.73(b) is enclosed. (Form PTO/SB/96).
**SIGNATURE of Applicant or Assignee of Record**

Name

Markku Kirvesmäki

Signature



Date

4.4.2002

NOTE: Signatures of all the inventors or assignees of record of the entire interest or their representative(s) are required. Submit multiple forms if more than one signature is required, see below\*.

☒ \*Total of 5 forms are submitted.

Burden Hour Statement: This form is estimated to take 3 minutes to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.



Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

**DECLARATION FOR UTILITY OR  
DESIGN  
PATENT APPLICATION  
(37 CFR 1.63)**

☐

Declaration  
Submitted  
with Initial  
Filing

OR

☒

Declaration  
Submitted after Initial  
Filing (surcharge  
(37 CFR 1.16 (e))  
required)

Attorney Docket Number

FORSAL-36

First Named Inventor

Holopainen, Kari

**COMPLETE IF KNOWN**

Application Number

10/070,024

Filing Date

Art Unit

Examiner Name

As the below named inventor, I hereby declare that:

My residence, mailing address, and citizenship are as stated below next to my name.

I believe I am the original and first inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled:

SHOE ROLL

(Title of the Invention)

the specification of which

☐

is attached hereto

OR

☒

was filed on (MM/DD/YYYY)

August 25, 2000

as United States Application Number or PCT International

Application Number

PCT/FI00/00726

and was amended on (MM/DD/YYYY)

February 26, 2002

(if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56, including for continuation-in-part applications, material information which became available between the filing date of the prior application and the national or PCT international filing date of the continuation-in-part application.

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or (f), or 365(b) of any foreign application(s) for patent, inventor's or plant breeder's rights certificate(s), or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent, inventor's or plant breeder's rights certificate(s), or any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached?	
				YES	NO
19991823	FI	08/27/1999	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
20000399	FI	02/21/2000	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

☐

Additional foreign application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto:

[Page 1 of 2]

Burden Hour Statement: This form is estimated to take 21 minutes to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

**DECLARATION — Utility or Design Patent Application**

Direct all correspondence to: <input checked="" type="checkbox"/> Customer Number or Bar Code Label		020,455		OR <input type="checkbox"/> Correspondence address below	
<b>Name</b>					
<b>Address</b>					
<b>City</b>			<b>State</b>		<b>ZIP</b>
<b>Country</b>		<b>Telephone</b>		<b>Fax</b>	
I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.					
<b>NAME OF SOLE OR FIRST INVENTOR :</b>				<input type="checkbox"/> A petition has been filed for this unsigned inventor	
<b>Given Name</b> (first and middle [if any]) <u>Kari</u>			<b>Family Name</b> or Surname <u>Holopainen</u>		
<b>Inventor's Signature</b> <u>Ka-Holopainen</u>					<b>Date</b> <u>19-3-2002</u>
<b>Residence: City</b> <u>Muurame</u>		<b>State</b> <u>FI</u>	<b>Country</b> <u>Finland</u>		<b>Citizenship</b> <u>FI</u>
<b>Mailing Address</b> <u>Haapalahdentie 4</u>					
<b>City</b> <u>Muurame</u>		<b>State</b>	<b>ZIP</b> <u>FIN-40950</u>		<b>Country</b> <u>Finland</u>
<b>NAME OF SECOND INVENTOR:</b>				<input type="checkbox"/> A petition has been filed for this unsigned inventor	
<b>Given Name</b> (first and middle [if any]) <u>Markku</u>			<b>Family Name</b> or Surname <u>Kyytsönen</u>		
<b>Inventor's Signature</b> <u>Markku Kyytsönen</u>					<b>Date</b> <u>4.4.2002</u>
<b>Residence: City</b> <u>Numminen</u>		<b>State</b> <u>FI</u>	<b>Country</b> <u>Finland</u>		<b>Citizenship</b> <u>FI</u>
<b>Mailing Address</b> <u>Jokivarrentie 141</u>					
<b>City</b> <u>Numminen</u>		<b>State</b>	<b>ZIP</b> <u>FIN-04660</u>		<b>Country</b> <u>Finland</u>
<input checked="" type="checkbox"/> Additional inventors are being named on the ____ supplemental Additional Inventor(s) sheet(s) PTO/SB/02A attached hereto.					

Please type a plus sign (+) inside this box → ☐

PTO/SB/02A (11-00)

Approved for use through 10/31/2002. OMB 0651-0032  
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

**DECLARATION****ADDITIONAL INVENTOR(S)****Supplemental Sheet**Page 1 of 1

<b>Name of Additional Joint Inventor, if any:</b>		<input type="checkbox"/> A petition has been filed for this unsigned inventor	
Given Name (first and middle [if any]) <u>3 Hannu</u>		Family Name or Surname <u>Pullinen</u>	
Inventor's Signature <u>Hannu Pullinen</u>		Date <u>8.4.2002</u>	
Residence: City <u>Riihimäki</u>	State <u>FI</u>	Country <u>Finland</u>	Citizenship <u>FI</u>
Mailing Address <u>Kuuselantie 27</u>			
Mailing Address			
City <u>Riihimäki</u>	State	ZIP <u>FIN-11130</u>	Country <u>Finland</u>
<b>Name of Additional Joint Inventor, if any:</b>		<input type="checkbox"/> A petition has been filed for this unsigned inventor	
Given Name (first and middle [if any]) <u>4 Aaron</u>		Family Name or Surname <u>Mannio</u>	
Inventor's Signature <u>Aaron Mannio</u>		Date <u>4.4.2002</u>	
Residence: City <u>Järvenpää</u>	State <u>FI</u>	Country <u>Finland</u>	Citizenship <u>FI</u>
Mailing Address <u>Ylämaankatu 5</u>			
Mailing Address			
City <u>Järvenpää</u>	State	ZIP <u>FIN-04430</u>	Country <u>Finland</u>
<b>Name of Additional Joint Inventor, if any:</b>		<input type="checkbox"/> A petition has been filed for this unsigned inventor	
Given Name (first and middle [if any]) <u>5 Markku</u>		Family Name or Surname <u>Kirvesmäki</u>	
Inventor's Signature <u>Markku Kirvesmäki</u>		Date <u>4.4.2002</u>	
Residence: City <u>Järvenpää</u>	State <u>FI</u>	Country <u>Finland</u>	Citizenship <u>FI</u>
Mailing Address <u>Tupalantie 7 B 19</u>			
Mailing Address			
City <u>Järvenpää</u>	State	ZIP <u>FIN-04400</u>	Country <u>Finland</u>

Burden Hour Statement: This form is estimated to take 21 minutes to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.